

Certification & Patent

專利與認證

金石門公司的數位扭力扳手擁有多國專利設計，SGS實驗室之CE安全認證，同時得到36個國家的專利許可，提供高品質的產品，以滿足客戶的需求。

Asmith digital torque wrench has 36 countries patent, example: SGS's CE certification provide high quality product.



台灣專利
Taiwan patent



大陸專利
Mainland China patent



歐盟專利
EU patent



SGS 認證
SGS certification



TAF 扭力校正報告
TAF calibration certificate



台灣精品獎
Taiwan Excellence Award

CONTENT

- 01 扳手選擇方法
How to choose a torque wrench

電速數位扭力扳手(WiFi+藍牙款)
Power Speed Digital Torque Wrench (WiFi & Bluetooth)

- 07 **WA-E (BW)** (角度/Angle)

機電扭力扳手(藍牙款)
Mechanical Torque Wrench (Bluetooth)

- 12 **WD-Q-BT** (標準/Standard)

- 13 **WD-I-BT** (換頭/Interchangeable)

數位扭力扳手
Digital Torque Wrench

一般型 Standard

- 20 **WM-Q(-BT)** (迷你-藍牙/Mini-Bluetooth)

- 21 **WQ** (標準/Standard)

- 22 **WQ-BT** (藍牙/Bluetooth)

- 23 **WA** (角度/Angle)

換頭型 Interchangeable

- 24 **WM-I(-BT)** (迷你-藍牙/Mini-Bluetooth)

- 25 **WI** (標準/Standard)

- 26 **WI-BT** (藍牙/Bluetooth)

起子型 Screwdriver

- 28 **WM-SD(-BT)** (起子-藍牙/Screwdriver-Bluetooth)

- 29 **WM-B (-BT)** (扳手-藍牙/Wrench-Bluetooth)

- 27 扭力接頭
Insert tools

- 30 **BIT**起子頭工具架套組
Screwdriver Bit Set

數位扭力顯示器
Digital Torque Adapter

- 31 **WS** (標準/Standard)

- 32 **WS-A** (角度/Angle)

- 33 扳手校正機
Torque Calibration System

四步驟選擇扳手(4 Steps To Choose A Wrench)

若已知扭力，可直接進入 4.選擇扳手，請參考第3頁

If the torque is known, you can proceed directly to Step 4: Selecting a Wrench(refer to p.3)



1

■ 螺絲等級

如不鏽鋼螺絲，屬於標準品『T』等級，如紅框

■ Screw Grade

For stainless steel screws, they belong to the standard grade "T"

螺絲適用分級 Screws and applicable T series				
說明illustrate 等級分類 Level classification	Standard T series 標準品	0.5 T series 電子產品	1.8 T series 鎢鋼, 鉻鉬鋼	2.4 T series 建築鋼構
Screws (Strength 硬度) 螺絲 (Material 材質)	4.6~6.6 SS 不鏽鋼 SC 碳鋼	- CR (Brass) 紅銅 CB (Copper) 黃銅 AB (Aluminum) 鋁	8.8~12.9 SCr 鉻鋼 SNC 鎳鉻鋼 SCM 鉻鉬鋼	10.9~12.9 SCr 鉻鋼 SNC 鎳鉻鋼 SCM 鉻鉬鋼 SNCM 鎳鉻鉬鋼
適用產品 (Applicable products)	一般螺絲 Ordinary products	電子零件 Electronic products	工具、引擎、機械 Vehicles, Engines	建築零件 Construction products


2

■ 螺紋寬度

若寬度10mm，則代號為『M10』

■ Thread Width

If the width is 10mm, it is designated as『M10』



3

■ 確認扭力

如右表格紅框，『M10 + T 等級』，則對應為『24.5 Nm』

■ Confirming Torque

『M10 + T grade』 corresponds to『24.5 Nm』

扭力單位換算表 / Torque Unit Conversion Table					
單位 / Unit	lbf-in	lbf-ft	kgf-cm	cN-m	N-m
1 lbf - in	1	0.083	1.152	11.3	0.113
1 lbf - ft	12	1	13.83	135.6	1.356
1 kgf - cm	0.868	0.072	1	9.807	0.098
1 cN - m	0.088	0.007	0.102	1	0.01
1 N - m	8.851	0.738	10.2	100	1

Screw torque value comparison
Standard tightening torque

Unit: Nm

Nominal Size of Screw	T	0.5T	1.8T	2.4T
M1	0.0195	0.0098	0.035	0.047
(M1.1)	0.027	0.0135	0.049	0.065
M1.2	0.037	0.0185	0.066	0.088
(M1.4)	0.058	0.029	0.104	0.14
M1.6	0.086	0.043	0.156	0.205
(M1.8)	0.128	0.064	0.23	0.305
M2	0.176	0.088	0.315	0.42
(M2.2)	0.23	0.116	0.41	0.55
M2.5	0.36	0.18	0.65	0.86
M3	0.63	0.315	1.14	1.5
(M3.5)	1	0.5	1.8	2.4
M4	1.5	0.76	2.7	3.6
(M4.5)	2.15	1.08	3.9	5.2
M5	3	1.5	5.4	7.2
M6	5.2	2.6	9.2	12.2
(M7)	8.4	4.2	15	20
M8	12.5	6.2	22	29.5
M10	24.5	12.5	44	59
M12	42	21	76	100
M14	68	34	122	166
M16	106	53	190	255
(M18)	146	73	270	350
M20	204	102	370	490
(M22)	282	140	500	670
M24	360	180	650	860
(M27)	520	260	940	1240
M30	700	350	1260	1700
(M33)	960	480	1750	2300
M36	1240	620	2250	3000
(M39)	1600	800	2900	3800
M42	2000	1000	3600	4800
(M45)	2500	1260	4500	6000

Standard axial stress 210 N/mm² stress area of bolt(JIS 1082)


Note: This is not converted from standard tightening torque kgf.cm

4
選擇扳手

透過您常用的工具配件，決定您適用的扳手系列

Selecting a Wrench

Determine the appropriate wrench series through tool accessories

螺絲頭 / 工具 Screw head / Tool	扳手 Wrench	扳手扭力 Torque Range	扳手系列 Wrench series	扳手功能 Wrench Function	頁數 p.
 + 		5~220 Nm	WA-E	電動、數位、藍牙、WiFi、角度△° Electric, Digital, BlueTooth, WiFi, Angle	07
		15~100 Nm	WD-Q	機械、電子、藍牙 Mechanical, Electronic, BlueTooth	12
		0.9~25 Nm	WM-Q	數位、藍牙 Digital, BlueTooth	20
		4.5~1000 Nm	WQ	數位、藍牙 Digital, BlueTooth	21~22
		4.5~1000 Nm	WA	數位、角度△° Digital, Angle	23
		9~340 Nm	WS	數位、檢驗 Digital, Verification	31
		20~340 Nm	WS-A	數位、檢驗、角度△° Digital, Verification, Angle	32
 +  + 		5~200 Nm	WD-I	機械、電子、藍牙 Mechanical, Electronic, BlueTooth	13
		0.9~25 Nm	WM-I	數位、藍牙 Digital, BlueTooth	24
		4.5~400 Nm	WI	數位、藍牙 Digital, BlueTooth	25~26
 +  + 		0.1~4 Nm	WM-SD	起子、數位、藍牙 Screwdriver, Digital, BlueTooth	28
		0.9~25 Nm	WM-B	數位、藍牙 Digital, BlueTooth	29



電速數位扭力扳手 (藍牙+Wifi款) *Power Speed Digital Torque Wrench (BT & WiFi)*

- 雙重模式，動力和手動模式均內建在一個棘輪中，螺絲可迅速鎖定，以達節省時間效果
- 動力齒輪轉速 150~260轉/分鐘，扭力約 1 Nm
- 藍牙連接裝置，可隨時瀏覽歷史紀錄
- 透過WiFi連線電腦，並可透過自行開發的軟體對多隻扳手發號施令
- 有四種不同警示的LED指示燈
- 可拆式充電鋰電池可快速充電，2800mAh可在60分鐘內充電超過80%
- 50組扭力預設值
- 高達 5000 個扭力歷史記錄容量，用於特定 QC 分析
- 可自行設定公差值，更加符合標準化的公差範圍

- Dual Mode: Both Power and Manual modes are built into a single ratchet, allowing screws to be quickly locked and saving time
- Power Gear rotation speed: 150–260 RPM, with a torque of approximately 1 Nm
- Connects via Bluetooth to devices, enabling the browsing of historical records at any time
- Can connect to a computer via WiFi and control multiple wrenches through custom-developed software
- Equipped with four different warning LED indicators
- Removable lithium battery enables rapid charging, allowing a quick charge to reach over 80% in 60 minutes for a 2800 mAh battery
- Stores up to 50 memory setting values
- Can store up to 5000 torque history records for specific QC analysis
- Set target value tolerance according to your preferences, making it more convenient to adhere to standardized tolerance ranges



APP



電腦軟體
Software


WA-E (BW)**電速數位扭力扳手 Power Speed Digital Torque Wrench****產品規格 / Product Specifications**

記憶容量 Memory Capacity	5000 sets
單位選擇 Torque Units	Nm, kg.m, ft-lb, in-lb
防塵等級 Dust Protection Rating	IP5X
操作溫度 Operating Temperature	-20°C ~ 60°C
操作濕度 Operating Humidity	90%以下(最佳65%以下) Below 90% (Optimal Below 65%)
儲存溫度 Storage Temperature	< 35°C(最佳23°C) < 35°C(Optimal 23°C)
掉落測試 Drop Test	1m
振動測試 Shaking Test	100Hz & 500Hz & 2000Hz
鹽霧測試 Salt Spray Test	48hrs
電池充電循環 Battery Charging Cycle	可達600次 Up to 600 times
電池充容量 Battery Capacity	2800 mAh

WA-E (BW)

電速數位扭力扳手 Power Speed Digital Torque Wrench



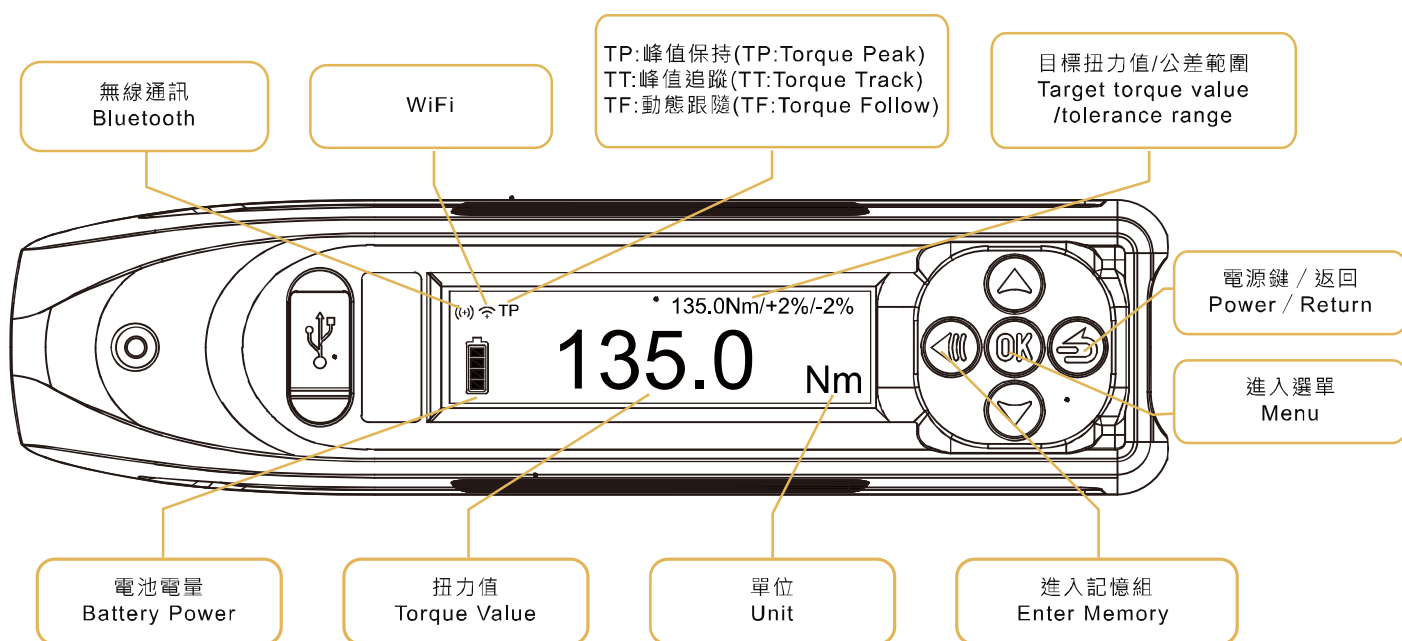

WA-E (BW)

電速數位扭力扳手 Power Speed Digital Torque Wrench

WA-E135-2-BW



- 電動棘輪方頭：動力齒輪轉速 150~260轉/分鐘，扭力約 1 Nm
- 角度功能：可在無受力狀態下量測旋轉多少角度的功能
- WiFi功能-1對多：利用自行開發的通訊軟體，可連接WiFi並向多台扳手發送指令，從而實現高效的控制和管理
- 配件：吹氣盒x1, 出廠校驗報告(符合ISO品質認證規範)x1, 說明書x1, 充電座x1, 變壓器x1, 鋰電池x1, 磁性套組x1
- Electric Ratchet Square Head : Power Gear rotation 150~260RPM, and torque is about 1 Nm
- Angle Measurement Function: Enables measurement of rotation angles in the absence of external force
- WiFi Function - One-to-Many: Features self-developed communication software that connects via WiFi, allowing commands to be sent to multiple wrenches for efficient control and management
- Content : Blow Mold Case x1, Factory calibration report (compliant with ISO quality certification standards) x1, User guide x1, charging cradle x1, power adapter x1, lithium battery x1, Magnetic insert x1

藍牙功能
Bluetooth features



SPECIFICATIONS:

※Unit Conversion : 1 Nm = 10.2kgf-cm = 0.102 kgf-m = 0.738 lbf-ft = 8.851 lbf-in

產品編號 Item No.	精度 Accuracy	棘輪方頭 Drive	棘輪齒數 Ratchet Teeth	設定範圍 Setting Range	解析度 Resolution	扳手長度 Length (mm)	扳手重量 Weight (g)
WA-E50-2-BW	CW:±2% CCW:±3%	3/8"	60	5-50 Nm / 1°~999°	0.01 Nm / 0.1°	410	890
WA-E135-2-BW		1/2"		13.5~135 Nm / 1°~999°	0.1 Nm / 0.1°	450	1014
WA-E220-3-BW				22-220 Nm / 1°~999°		530	1190

註：精度的扭力範圍在最大操作值的10%~100%

Notes: Accuracy guaranteed at 10% to 100% of full scale.

透過連線手機隨時掌握扭力，並輕鬆記錄每次操作亦可透過 (Micro USB)將數據保存於電腦

The new Bluetooth design enables a seamless connection to your smartphone, allowing you to monitor torque values in real time and effortlessly record each operation. You can also save data to your computer via a Micro USB connection.



機電扭力扳手 (藍牙款) *Mechanical Torque Wrench (BT)*

- 機械、數位與藍牙的整合，達到準確、快速及數據化需求
- 全新機械扭力跳脫結構，到達扭力值後，產生強大的跳脫力警示聲
- 扭力數字化顯示，透過旋鈕即可輕鬆設定扭力，使用後無需歸零也不影響壽命
- APP可進行循環計次功能，連線後，APP可紀錄歷史數據 (數據保存於該手機的APP內)
- 使用者可自行開發軟體，連線到扳手存取使用過程 (免費索取通訊協定)
- 廠內實測每5000次做一次校正，連續校正10次仍可保持精度穩定 (可索取校正流程，自行調整扭力數值進行校正)
- 四種單位選擇 N-m, ft-lb, in-lb, kgf-m
- 具有5000次使用次數到達提醒
- LCD數值顯示

- The integration of machinery, digital technology, and Bluetooth achieves accuracy, speed, and data-driven performance
- After reaching the preset value, the structure features a large buffer space and a distinct mechanical clicking sound, which effectively prevents applying force too quickly, ensuring that the screw does not exceed the preset torque value
- Torque can be easily set using the knob, with no need for zeroing after use, ensuring no impact on lifespan
- The app supports cycle counting. Once connected, it can record historical data (stored within the app on this device)
- Users can develop their own software to connect to the wrench and access the usage process (free protocol available for download)
- After 5,000 uses and calibration, the tool maintained stable accuracy even after 10 consecutive recalibrations
- Four unit options: Nm, ft-lb, in-lb, kgf-m
- A reminder is provided when 5000 usage cycles are reached
- LCD numerical display



APP



影片/Video

產品規格 / Product Specifications	
防水等級 IP Rating	IPX1
防塵等級 Dust Protection Rating	IP5X
操作溫度 Operating Temperature	-10°C ~ 50°C
儲存溫度 Storage Temperature	-10°C ~ 50°C
單位選擇 Torque Units	Nm, kg.m, ft-lb, lb-in
掉落測試 Drop Test	1m
振動測試 Shaking Test	100Hz & 500Hz
鹽霧測試 Salt Spray Test	48hrs
耐腐蝕測試 Corrosion Resistance Test	PASS
抗酸鹼測試 Acid-Alkaline Resistance Test	PASS
耐用度測試 Durability Test	經過10次校正・功能無任何異常 After 10 calibrations, the functionality remains without any abnormalities.

WD (-BT)


功能說明 Function Description



WD (-BT)

功能說明 Function Description



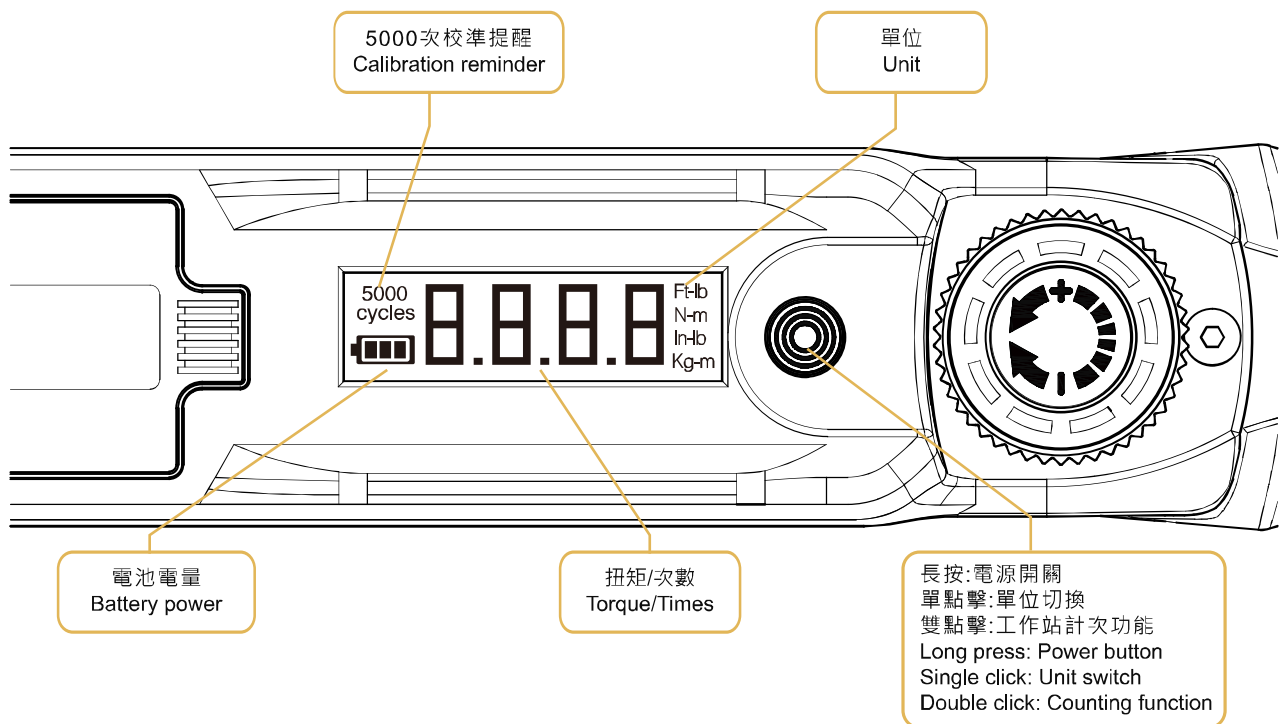

WD-Q (-BT)

一般型 - 機電扭力扳手(藍牙款) BT-Mechanical Torque Wrench



棘輪方頭
Drive

WD-Q100-2-BT



藍牙功能
Bluetooth features



■ 配件：收納用塑膠盒x1, 出廠校驗報告(符合ISO品質認證規範)x1, 說明書x1, AAA電池x2

■ Content : Plastic storage box x1, Factory calibration report (compliant with ISO quality certification standards) x1

SPECIFICATIONS:

※Unit Conversion : 1 Nm = 0.102 kgf-m = 0.738 lbf-ft = 8.851 lbf-in

產品編號 Item No.	精度(CW) Accuracy	棘輪方頭 Drive	棘輪齒數 Ratchet Teeth	設定範圍 Setting Range	解析度 Resolution	扳手長度 Length (mm)	扳手重量 Weight (g)	備註 Remark
WD-Q100-2-BT	≥20Nm:±3% <20Nm:±4%	3/8"	72	15~100 Nm	0.2 Nm	485	1040	單向 Unidirectional

1. APP可進行循環計次功能
 2. 連線後，APP可紀錄歷史數據
(數據保存於該手機的APP內)
1. APP for cycle counting.
 2. Once connected, the app can record historical data (Data is stored within the app on this device).

WD-I (-BT) Series

換頭型 - 機電扭力扳手(藍牙款) BT-Mechanical Interchangeable Torque Wrench



配件：收納用塑膠盒x1, 出廠校驗報告(符合ISO品質認證規範)x1, 說明書x1, AAA電池x2

Content : Plastic storage box x1, Factory calibration report (compliant with ISO quality certification standards) x1

SPECIFICATIONS:

※Unit Conversion : 1 Nm = 0.102 kgf-m = 0.738 lbf-ft = 8.851 lbf-in

產品編號 Item No.	精度(CW) Accuracy	插槽 Insert	棘輪方頭 Drive	棘輪齒數 Ratchet Teeth	設定範圍 Setting Range	解析度 Resolution	扳手長度 Length (mm)	扳手重量 Weight (g)	備註 Remark
WD-I30-1-BT	≥15Nm:±3% <15Nm:±4%	9x12mm	1/4"	72	5~30 Nm	0.1 Nm	361	510	可雙向 Bidirectional
WD-I100-2-BT	≥20Nm:±3% <20Nm:±4%	14x18mm	3/8"		15~100 Nm	0.2 Nm	483	1140	可雙向 Bidirectional
WD-I200-3-BT	≥40Nm:±3% <40Nm:±4%		1/2"		30~200 Nm	0.5 Nm	585	1510	可雙向 Bidirectional

藍牙功能 Bluetooth features



- APP可進行循環計次功能
 - 連線後，APP可紀錄歷史數據 (數據保存於該手機的APP內)
- APP for cycle counting.
 - Once connected, the app can record historical data (Data is stored within the app on this device).



數位扭力扳手 *Digital Torque Wrench*

- LCD背光顯示
- 順時針及逆時針皆可操作
- 峰值保持(K) 與 扭力追隨(F)模式 (可訂製特殊K模式)
- 四種扭力單位，可供選擇切換: N-m, kgf-cm, lbf-in, lbf-ft
WM-SD系列為三種扭力單位: cN-m, kgf-cm, in-lb
- 蜂鳴聲、LED燈警示(到達預設扭力值80%時)
- 震動警示(到達預設扭力值90%時)
- 省電模式：2分鐘自動關機 (可訂製不開機模式)
- 記錄使用次數、歷史最大扭力
- 電池款:一般型:AA電池*2
迷你型:AAA電池*2
- 充電款:Type-C充電線
- 藍牙款:透過藍牙連線手機，隨時查詢歷史扭力紀錄(最多可瀏覽1000筆)
可透過Type-C將歷史扭力紀錄傳輸到電腦，以利品質控管
- LCD backlight display
- Both operator for cw, ccw
- Two modes : F(Track) / K(Peak)
- 4 units change: N-m, kgf-cm, lbf-in, lbf-ft
The WM-SD series offers 3 available torque units: cN-m, kgf-cm, and in-lb
- Warning function : Beep, LED indicator
(When reach the torque setting value 80%)
- Vibration function : When reach the torque setting value 90%
- Automatically powers off when not in use for 2 minutes
(The non-shutdown mode can be customized)
- Recording usage frequency and the historical maximum torque
- Battery Type: Standard Type: AA x 2 batteries
Mini Type: AAA x 2 batteries
- Recharge Type: Type-C cable
- Bluetooth Type: Access historical data at any time through Bluetooth connection to the mobile phone.(View up to 1000 records)
connect via Type-C to save data on the computer



BT-APP



影片-藍牙款
Video-BT



電腦軟體-藍牙款
Software-BT



影片-標準款
Video

充電款技術規格 / Rechargeable Battery Technical Data (Battery : Standard 16650/ Mini 10440)			
電池壽命：充滿電操作時間 Battery life(fully charged used time)	8~10 hrs	充電輸入電壓 Charging Input Voltage	5V-1A
標稱電壓 Nominal Voltage	3.7V	內阻 Internal Resistance	< 60mΩ
充電時間 Recharge Time	Standard 90-120 mins / Mini 60-90 mins		
使用環境（溫度） Storage conditions (Temperature)	Recharge：10℃~ 45℃ Discharge：-10℃ ~ 60℃ Storage：-20℃ ~ 25℃ (< 1 year) -20℃ ~ 40℃ (< 3 months) -20℃ ~ 50℃ (< 1 month)		
	Work：20% ~ 85%RH (not condensed) Storage：40% ~ 85%RH (not condensed)		
	Standard 1600mAh / Mini 640mAh		
	電池標準充放電300次循環後高於容量80% Capacity remains above 80% after 300 standard charge-discharge cycles.		
內建雙重保護IC電路 Built-in Dual Protection IC Circuit	提供過壓充電、過壓放電、過流充電、過熱過載、 		





藍牙充電款：內建電芯保護特規電池，請勿自行更換市售充電電池。
Bluetooth Type : Built-in battery with special specifications for cell protection, please do not replace it with commercially available rechargeable batteries.



WM-Q(-BT)



棘輪切換
Reversible ratchet



棘輪方頭
Square head



快速脫離
Quick release

WM-I(-BT)



棘輪切換
Reversible ratchet



棘輪方頭/插槽
Square head / Insert



快速脫離
Quick release

WM-SD(-BT)



強磁吸附
Magnetic adsorption



Bit 六角插槽
Bit Insert(Hex)



前拉脫離
Front pull out

WM-B(-BT)




棘輪切換
Reversible ratchet



Bit 六角插槽
Bit Insert(Hex)




夾持設計
Clamping Mechanism



藍牙充電款：內建電芯保護特規電池，請勿自行更換市售充電電池
Bluetooth Type：Built-in battery with special specifications for cell protection, please do not replace it with commercially available rechargeable batteries.



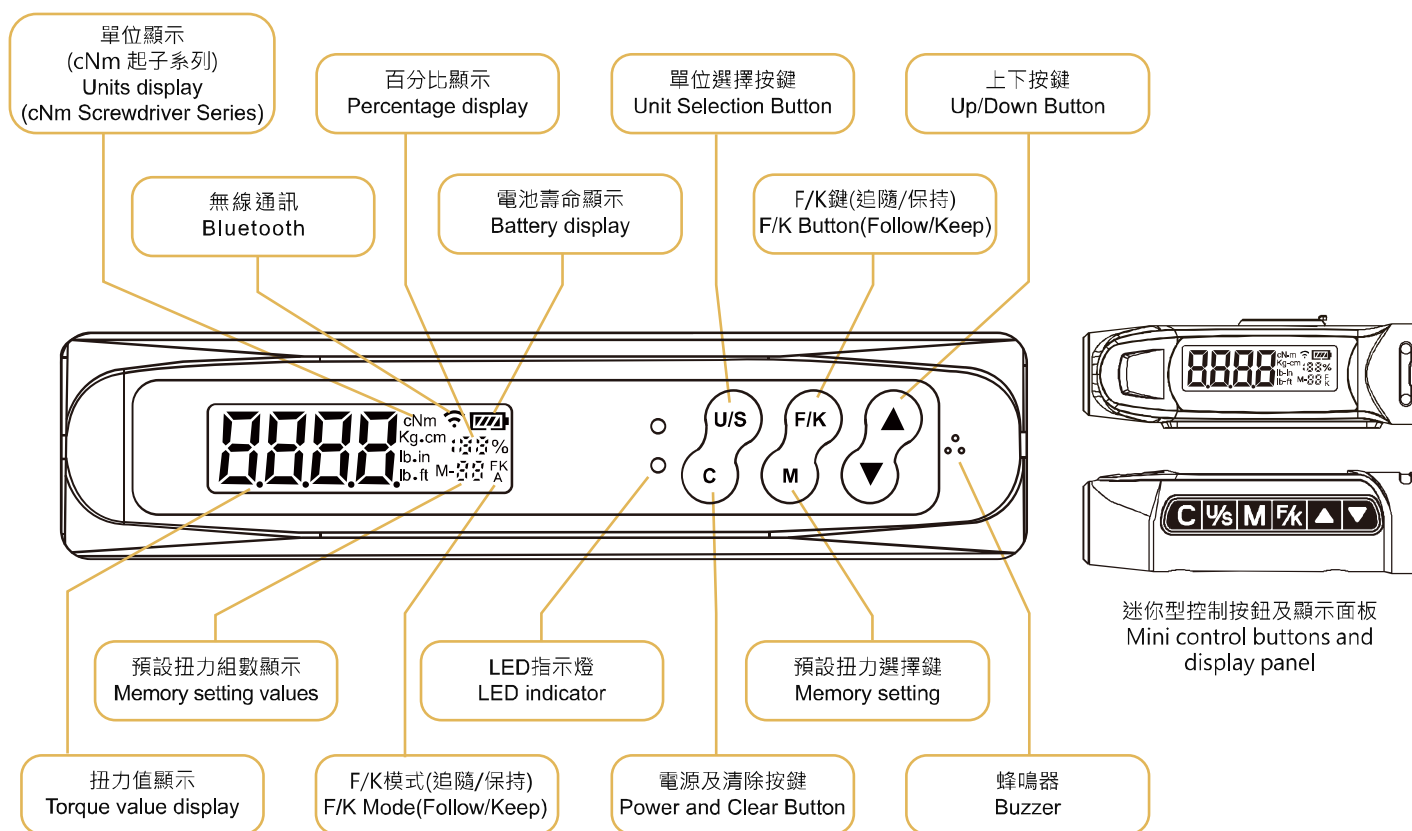

WM-Q(-BT) Series

迷你一般型 - 數位扭力扳手 Mini Digital Torque Wrench

WM-Q



WM-Q(-BT)



棘輪方頭
Drive

藍牙功能
Bluetooth features



扳手內建記憶體，
可將扳手歷史數據
連線手機進行輸出

The wrench has
built-in memory,
allowing it to connect
to a mobile phone to
output historical data.

配件：收納用鐵製工具盒x1, 出廠校驗報告(符合ISO品質認證規範)x1, 說明書(中/英)x1, 藍牙-充電款: Type-C 充電線
電池款: AAA電池x2, 迷你螺絲起子(更換電池用)x1,

Content : Storage steel box x1, Certificate of calibration report (Using ISO specification) x1, User guide(Bilingual) x1,
Bluetooth Type: Type-C cable, Battery Type: Mini screwdriver(replace the battery) x1

SPECIFICATIONS:

※Unit Conversion : 1 Nm = 10.2 kgf-cm = 0.738 lbf-ft = 8.851 lbf-in

產品編號 Item No.		精度 Accuracy	棘輪方頭 Drive	棘輪齒數 Ratchet Teeth	顯示及設定範圍 Setting Range	建議使用範圍 Suggested Range	解析度 Resolution	扳手長度 Length(mm)	扳手重量 Weight(g)
電池款 Battery Type	藍牙-充電款 Bluetooth Type								
WM-Q06-1	WM-Q06-1-BT	CW:±3% CCW:±4%	1/4"	72	0.3~6 Nm	0.9~6 Nm	0.01 Nm	244	210
WM-Q15-1	WM-Q15-1-BT				0.75~15 Nm	2.25~15 Nm			
WM-Q25-1	WM-Q25-1-BT				1.25~25 Nm	3.75~25 Nm			

註：精度的扭力範圍在最大操作值的20%~100%

Notes: Accuracy guaranteed at 20% to 100% of full scale.

ASMITH

WQ Series**一般型 - 數位扭力扳手 Digital Torque Wrench**

WQ-200-3



- 配件：收納用鐵製工具箱x1, 出廠校驗報告(符合ISO品質認證規範)x1, 說明書(中/英)x1, AA電池x2
 ■ Content：Storage steel box x1, Certificate of calibration report x1, User guide(Bilingual) x1

SPECIFICATIONS:

✗Unit Conversion : 1 Nm = 10.2 kgf-cm = 0.738 lbf-ft = 8.851 lbf-in

產品編號 Item No. 電池款 Battery Type	精度 Accuracy	棘輪方頭 Drive	棘輪齒數 Ratchet Teeth	顯示及設定範圍 Setting Range	建議使用範圍 Suggested Range	解析度 Resolution	扳手長度 Length(mm)	扳手重量 Weight(±50g)		
WQ-30-1	CW:±1.5% CCW:±2.5%	1/4"	72	1.5~30 Nm	4.5~30 Nm	0.01 Nm	410	720		
WQ-30-2		3/8"		9~60 Nm				740		
WQ-60-2										
WQ-135-2		1/2"		6.8~135 Nm	20~135 Nm	0.1 Nm	434	890		
WQ-135-3				10~200 Nm	30~200 Nm		454	1080		
WQ-200-3							565	1300		
WQ-340-3				17~340 Nm	50~340 Nm		666	1420		
WQ-600-4		3/4"	24	30~600 Nm	90~600 Nm	1 Nm	940	3800		
WQ-800-4				40~800 Nm	120~800 Nm		1235	4800		
WQ-1000-4				50~1000 Nm	150~1000 Nm					

註：精度的扭力範圍在最大操作值的20%~100%

Notes: Accuracy guaranteed at 20% to 100% of full scale.

WQ-BT Series

一般型(藍牙款) - 數位扭力扳手 BT-Digital Torque Wrench

WQ-60-2-BT



配件：收納用鐵製工具箱x1, 出廠校驗報告(符合ISO品質認證規範)x1, 說明書(中/英)x1, Type-C 充電線

Content : Storage steel box x1, Certificate of calibration report (Using ISO specification) x1, User guide(Bilingual) x1, Type-C cable

SPECIFICATIONS:

※Unit Conversion : 1 Nm = 10.2 kgf-cm = 0.738 lbf-ft = 8.851 lbf-in

產品編號 Item No.	精度	棘輪方頭	棘輪齒數	顯示及設定範圍	建議使用範圍	解析度	扳手長度	扳手重量
藍牙-充電款 Bluetooth Type	Accuracy	Drive	Ratchet Teeth	Setting Range	Suggested Range	Resolution	Length(mm)	Weight(±50g)
WQ-30-1-BT	CW:±1.5% CCW:±2.5%	1/4"	72	1.5~30 Nm	4.5~30 Nm	0.01 Nm	394	770
WQ-30-2-BT		3/8"		9~60 Nm				795
WQ-60-2-BT								
WQ-135-2-BT		0.1 Nm		418	898			
WQ-135-3-BT				438	1114			
WQ-200-3-BT				549	1272			
WQ-340-3-BT			650	1470				
WQ-600-4-BT			940	3902				
WQ-800-4-BT			1235	4695				
WQ-1000-4-BT					1 Nm			

藍牙功能 Bluetooth features



扳手內建記憶體，可將扳手歷史數據連線手機進行輸出

The wrench has built-in memory, allowing it to connect to a mobile phone to output historical data.

註：精度的扭力範圍在最大操作值的20%~100%

Notes: Accuracy guaranteed at 20% to 100% of full scale.

WA Series

角度專業型 - 數位扭力扳手 Digital Angle Torque Wrench

WA-30-1



- 可訂製藍牙功能款
- 鎖固時·可量測旋轉多少角度的功能
- 配件：收納用鐵製工具箱x1, 出廠校驗報告(符合ISO品質認證規範)x1, 說明書(中/英)x1, AA電池x2
- Customizable Bluetooth
- Can measurement the degree after tighten the screw or nut
- Content : Storage steel box x1, Certificate of calibration report (Using ISO specification) x1, User guide(Bilingual) x1

SPECIFICATIONS:

※Unit Conversion : 1 Nm = 10.2 kgf-cm = 0.738 lbf-ft = 8.851 lbf-in

產品編號 Item No.	精度	棘輪方頭	棘輪齒數	顯示及設定範圍	建議使用範圍	解析度	扳手長度	扳手重量
電池款Battery Type	Accuracy	Drive	Ratchet Teeth	Setting Range	Suggested Range	Resolution	Length(mm)	Weight(±50g)
WA-30-1	CW:±1.5% CCW:±2.5%	1/4"	72	1.5~30 Nm / 0.1°~360°	4.5~30 Nm	0.01 Nm / 0.1°	410	720
WA-60-2		3/8"		3~60 Nm / 0.1°~360°	9~30 Nm			740
WA-135-2				1/2"	6.8~135 Nm / 0.1°~360°	20~135 Nm	0.1 Nm / 0.1°	434
WA-135-3		10~200 Nm / 0.1°~360°			30~200 Nm	454		1080
WA-200-3		24	17~340 Nm / 0.1°~360°	50~340 Nm	565	1300		
WA-340-3			30~600 Nm / 0.1°~360°	90~600 Nm	666	1420		
WA-600-4			3/4"	40~800 Nm / 0.1°~360°	120~800 Nm	940	3800	
WA-800-4				50~1000 Nm / 0.1°~360°	150~1000 Nm	1 Nm / 0.1°	1235	4800
WA-1000-4								

註：精度的扭力範圍在最大操作值的20%~100%

Notes: Accuracy guaranteed at 20% to 100% of full scale.

WM-I(-BT) Series

迷你換頭型 - 數位扭力扳手

Mini Digital Interchangeable Torque Wrench



加購配件，請參考27頁
Extra purchase accessories
Please refer to P.27



棘輪方頭/插槽
Drive / Insert



藍牙功能 Bluetooth features



扳手內建記憶體，
可將扳手歷史數據
連線手機進行輸出

The wrench has
built-in memory,
allowing it to connect
to a mobile phone to
output historical data.

■ 配件：收納用鐵製工具盒x1, 出廠校驗報告(符合ISO品質認證規範)x1, 說明書(中/英)x1, 棘輪接頭x1, 藍牙-充電款: Type-C 充電線
電池款: AAA電池x2, 迷你螺絲起子(更換電池用)x1

■ Content : Storage steel box x1, Certificate of calibration report (Using ISO specification) x1, User guide(Bilingual) x1,
Ratchet insert tool x1, Bluetooth Type: Type-C cable, Battery Type: Mini screwdriver(replace the battery) x1

SPECIFICATIONS:

※Unit Conversion : 1 Nm = 10.2 kgf-cm = 0.738 lbf-ft = 8.851 lbf-in

產品編號 Item No.	電池款 Battery Type	藍牙-充電款 Bluetooth Type	精度 Accuracy	插槽 Insert	棘輪方頭 Drive	棘輪齒數 Ratchet Teeth	顯示及設定範圍 Setting Range	建議使用範圍 Suggested Range	解析度 Resolution	扳手長度 Length(mm)	扳手重量 Weight(g)
WM-I06-1		WM-I06-1-BT	CW:±3% CCW:±4%	9x12mm	1/4"	72	0.3~6 Nm	0.9~6 Nm	0.01 Nm	255	270
WM-I15-1		WM-I15-1-BT					0.75~15 Nm	2.25~15 Nm			
WM-I25-1		WM-I25-1-BT					1.25~25 Nm	3.75~25 Nm			

註：精度的扭力範圍在最大操作值的20%~100%

Notes: Accuracy guaranteed at 20% to 100% of full scale.

ASMITH

24

WI Series

換頭型 - 數位扭力扳手 Digital Interchangeable Torque Wrench



加購配件，請參考27頁
Extra purchase accessories
Please refer to P.27



WI-30-1



配件：收納用鐵製工具箱x1, 出廠校驗報告(符合ISO品質認證規範)x1, 說明書(中/英)x1, 棘輪接頭 x1, AA電池x2

Content：Storage steel box x1, Certificate of calibration report (Using ISO specification) x1, User guide(Bilingual) x1, Ratchet insert tool x1

SPECIFICATIONS:

※Unit Conversion：1 Nm = 10.2 kgf-cm = 0.738 lbf-ft = 8.851 lbf-in

產品編號 Item No. 電池款 Battery Type	精度 Accuracy	插槽 Insert	棘輪方頭 Drive	棘輪齒數 Ratchet Teeth	顯示及設定範圍 Setting Range	建議使用範圍 Suggested Range	解析度 Resolution	扳手長度 Length(mm)	扳手重量 Weight(±50g)
WI-30-1	CW:±2% CCW:±3%	9x12mm	1/4"	72	3~30 Nm	4.5~30 Nm	0.01 Nm	403	750
WI-60-2			3/8"		6~60 Nm	9~60 Nm		413	800
WI-135-2					13.5~135 Nm	20~135 Nm	0.1 Nm	425	900
WI-30-3		14x18mm	1/2"		3~30 Nm	6~30 Nm	0.01 Nm	435	950
WI-60-3					6~60 Nm	12~60 Nm			
WI-135-3					13.5~135 Nm	20~135 Nm	0.1 Nm	559	1350
WI-200-3					20~200 Nm	30~200 Nm			
WI-340-3					34~340 Nm	50~340 Nm			
WI-400-3					40~400 Nm	60~400 Nm		665	1500

註：精度的扭力範圍在最大操作值的20%~100%

Notes: Accuracy guaranteed at 20% to 100% of full scale.

WI-BT Series

換頭型(藍牙款) - 數位扭力扳手 BT-Digital Interchangeable Torque Wrench

WI-135-3-BT

僅附此棘輪頭
Only Accessory



加購配件，請參考27頁
Extra purchase accessories
Please refer to P.27



棘輪方頭/插槽
Drive / Insert

配件：收納用鐵製工具箱x1，出廠校驗報告(符合ISO品質認證規範)x1，說明書(中/英)x1，棘輪接頭 x1，Type-C 充電線

Content：Storage steel box x1, Certificate of calibration report (Using ISO specification) x1, User guide(Bilingual) x1, Ratchet insert tool x1, Type-C cable

SPECIFICATIONS:

※Unit Conversion : 1 Nm = 10.2 kgf-cm = 0.738 lbf-ft = 8.851 lbf-in

產品編號 Item No. 藍牙-充電款 Bluetooth Type	精度 Accuracy	插槽 Insert	棘輪方頭 Drive	棘輪齒數 Ratchet Teeth	顯示及設定範圍 Setting Range	建議使用範圍 Suggested Range	解析度 Resolution	扳手長度 Length (mm)	扳手重量 Weight (±50g)	
WI-30-1-BT	CW:±2% CCW:±3%	9x12mm	1/4"	72	3~30 Nm	4.5~30 Nm	0.01 Nm	387	778	
WI-60-2-BT			3/8"		6~60 Nm	9~60 Nm		397	810	
WI-135-2-BT					13.5~135 Nm	20~135 Nm	0.1 Nm	409	884	
WI-30-3-BT		14x18mm	1/2"		3~30 Nm	6~30 Nm	0.01 Nm	419	1110	
WI-60-3-BT					6~60 Nm	12~60 Nm				
WI-135-3-BT					13.5~135 Nm	20~135 Nm	0.1 Nm	543	1270	
WI-200-3-BT					20~200 Nm	30~200 Nm				
WI-340-3-BT					34~340 Nm	50~340 Nm				
WI-400-3-BT					40~400 Nm	60~400 Nm		649	1428	

藍牙功能 Bluetooth features



扳手內建記憶體，
可將扳手歷史數據
連線手機進行輸出

The wrench has
built-in memory,
allowing it to connect
to a mobile phone to
output historical data.

註：精度的扭力範圍在最大操作值的20%~100%


Notes: Accuracy guaranteed at 20% to 100% of full scale.

ASMITH

**W-Y
W-R Series**


扭力接頭 Insert Tools

9X12 開口式扭力接頭
Open-ended Insert tools

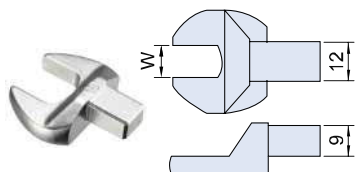


產品編號 Item No.	W (mm)	適用產品 Apply to
W-Y0107	7	WM-I06-1 WM-I15-1 WM-I25-1 WI-30-1 WI-60-2 WI-135-2 WD-I30-1-BT
W-Y0108	8	
W-Y0109	9	
W-Y0110	10	
W-Y0111	11	
W-Y0112	12	
W-Y0113	13	
W-Y0114	14	
W-Y0115	15	
W-Y0116	16	
W-Y0117	17	WI-30-1 WI-60-2 WI-135-2 WD-I30-1-BT
W-Y0118	18	
W-Y0119	19	
W-Y0121	21	
W-Y0122	22	
W-Y0123	23	
W-Y0124	24	

9X12 梅花式扭力接頭
Ring Insert tools

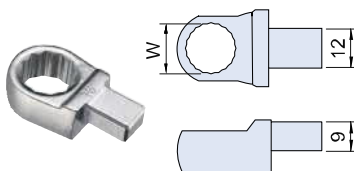

產品編號 Item No.	W (mm)	適用產品 Apply to
W-R0107	7	WM-I06-1 WM-I15-1 WM-I25-1 WI-30-1 WI-60-2 WI-135-2 WD-I30-1-BT
W-R0108	8	
W-R0109	9	
W-R0110	10	
W-R0111	11	
W-R0112	12	
W-R0113	13	
W-R0114	14	
W-R0115	15	
W-R0116	16	
W-R0117	17	WI-30-1 WI-60-2 WI-135-2 WD-I30-1-BT
W-R0118	18	
W-R0119	19	
W-R0121	21	
W-R0122	22	
W-R0123	23	
W-R0124	24	

14X18 開口式扭力接頭
Open-ended Insert tools

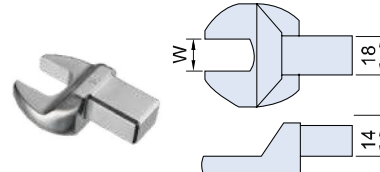

產品編號 Item No.	W (mm)	適用產品 Apply to
W-Y0213	13	WI-30-3 WI-60-3 WI-135-3 WI-200-3 WI-340-3 WI-400-3 WD-I100-2-BT WD-I200-3-BT
W-Y0214	14	
W-Y0215	15	
W-Y0216	16	
W-Y0217	17	
W-Y0218	18	
W-Y0219	19	
W-Y0221	21	
W-Y0222	22	
W-Y0224	24	
W-Y0226	26	
W-Y0227	27	
W-Y0230	30	
W-Y0232	32	
W-Y0234	34	
W-Y0236	36	
W-Y0238	38	
W-Y0241	41	

WM-SD(-BT) Series

迷你起子型-數位扭力起子

Mini Digital Torque Screwdriver

加購配件·請參考30頁
Extra purchase accessories
Please refer to P.30



藍牙功能 Bluetooth features



扳手內建記憶體，
可將扳手歷史數據
連線手機進行輸出

The wrench has
built-in memory,
allowing it to connect
to a mobile phone to
output historical data.

■ 配件：收納用鐵製工具箱x1, 出廠校驗報告(符合ISO品質認證規範)x1, 說明書(中/英)x1, 套筒用轉接頭(六角轉四角方頭1/4")x1,
藍牙-充電款: Type-C 充電線, 電池款: AAA電池x2, 迷你螺絲起子(更換電池用)x1

■ Content : Storage steel box x1, Certificate of calibration report (Using ISO specification) x1, User guide(Bilingual) x1,
1/4" Hex Shank Socket Adapter x1, Bluetooth Type: Type-C cable, Battery Type: Mini screwdriver(replace the battery) x1

SPECIFICATIONS:

※Unit Conversion : 1 cNm = 0.01 Nm = 0.102 kgf-cm = 0.088 lbf-in

產品編號 Item No.		精度 Accuracy	Bit 六角插槽 Bit Insert	顯示及設定範圍 Setting Range	建議使用範圍 Suggested Range	解析度 Resolution	起子長度 Length (mm)	起子重量 Weight (g)
電池款 Battery Type	藍牙-充電款 Bluetooth Type							
WM-SD50-1	WM-SD50-1-BT	CW:±3% CCW:±4%	1/4"	5~50 cNm	10~50 cNm (0.1~0.5 Nm)	0.1 cNm	234	180
WM-SD200-1	WM-SD200-1-BT			10~200 cNm	30~200 cNm (0.3~2 Nm)			
WM-SD400-1	WM-SD400-1-BT			20~400 cNm	60~400 cNm (0.6~4 Nm)			

註：精度的扭力範圍在最大操作值的20%~100%

Notes: Accuracy guaranteed at 20% to 100% of full scale.

WM-B(-BT) Series

迷你起子型-數位扭力扳手

Mini Digital Torque Wrench (Bit)

加購配件・請參考30頁
Extra purchase accessories
Please refer to P.30



Bit 六角插槽
Bit Insert



套筒用轉接頭
Hex shank socket adapter

WM-B



WM-B(-BT)



藍牙功能 Bluetooth features



扳手內建記憶體，
可將扳手歷史數據
連線手機進行輸出

The wrench has
built-in memory,
allowing it to connect
to a mobile phone to
output historical data.

配件：收納用鐵製工具箱x1, 出廠校驗報告(符合ISO品質認證規範)x1, 說明書(中/英)x1, 套筒用轉接頭(六角轉四角方頭1/4")x1,
藍牙-充電款: Type-C 充電線, 電池款: AAA電池x2, 迷你螺絲起子(更換電池用)x1

Content : Storage steel box x1, Certificate of calibration report (Using ISO specification) x1, User guide(Bilingual) x1,
1/4" Hex Shank Socket Adapter x1, Bluetooth Type: Type-C cable, Battery Type: Mini screwdriver(replace the battery) x1

SPECIFICATIONS:

※Unit Conversion : 1 Nm = 10.2 kgf-cm = 0.738 lbf-ft = 8.851 lbf-in

產品編號 Item No.		精度	Bit 六角插槽	棘輪齒數	顯示及設定範圍	建議使用範圍	解析度	扳手長度	扳手重量
Battery Type	藍牙-充電款 Bluetooth Type	Accuracy	Bit Insert	Ratchet Teeth	Setting Range	Suggested Range	Resolution	Length (mm)	Weight (g)
WM-B06-1	WM-B06-1-BT	CW:±3% CCW:±4%	1/4"	72	0.3~6 Nm	0.9~6 Nm	0.01 Nm	244	200
WM-B15-1	WM-B15-1-BT				0.75~15 Nm	2.25~15 Nm			
WM-B25-1	WM-B25-1-BT				1.25~25 Nm	3.75~25 Nm			

註：精度的扭力範圍在最大操作值的20%~100%

Notes: Accuracy guaranteed at 20% to 100% of full scale.

W-SB Series**BIT起子頭工具架套組 Screwdriver Bit Set**

W-SB25-1



W-SB25-2



W-SB25-3



W-SB25-4



W-SB25-5

SPECIFICATIONS:

產品編號 Item No.	規格 Specification	六角頭部 Insert Hex Shank	長度 Length	適用產品 Apply to
W-SB25-1	六角型 / Hex : 1.5mm, 2mm, 2.5mm, 3mm, 4mm, 5mm, 6mm	1/4"	~25mm	WM-SD series WM-B series
W-SB25-2	六角型 / Hex : 2mm, 2.5mm, 3mm, 4mm, 5mm, 6mm, 8mm			
W-SB25-3	一字 / Slotted : 4, 5.5, 7 十字 / Phillips : PH00, PH0, PH1, PH2			
W-SB25-4	星型 / Star Tamperproof : T10, T15, T20, T25, T27, T30, T40			
W-SB25-5	星型 / Star Tamperproof : T4, T5, T6, T7, T8, T9, T10			

數位扭力顯示器 *Digital Torque Adapter*

不僅可成為
數位扭力扳手
it can be an e-wrench

or be a torque corrector
更可變成
校正器使用

- 峰值保持(K)與扭力追隨(F)模式 (可訂製特殊K模式)
- 省電模式：2分鐘自動關機 (可訂製不開機模式)
- 記錄使用次數、歷史最大扭力
- 四種扭力單位，可供選擇切換：N·m, kgf·cm, lbf·in, lbf·ft
- 蜂鳴聲、LED燈警示(到達預設扭力值80%時)
※不得用於電動扳手或氣動扳手※
- Two modes : F(Track) / K(Peak)
- Automatically powers off when not in use for 2 minutes
(The non-shutdown mode can be customized)
- Recording usage frequency and the historical maximum torque
- 4 units change: N·m, kgf·cm, lbf·in, lbf·ft
- Warning function : Beep, LED indicator
(When reach the torque setting value 80%)
※Not for air wrench and electric wrench.※

WS Series

數位扭力顯示器 Digital Torque Adapter

WS-60-2



- 數位扭力轉接頭，接上一般或機械式棘輪扳手，即成為數位扭力扳手
- 配件：收納用鐵製工具盒x1, 出廠校驗報告(符合ISO品質認證規範)x1, 說明書(中/英)x1, CR2032鋰電池x1, 迷你螺絲起子(更換電池用)x1
- To connect any traditional ratchet wrench or hand socket wrench, it can be digital torque wrench.
- Content : Storage steel box x1, Certificate of calibration report (Using ISO specification) x1, User guide(Bilingual) x1, Mini screwdriver(replace the battery) x1

SPECIFICATIONS:

※Unit Conversion : 1 Nm = 10.2 kgf-cm = 0.738 lbf-ft = 8.851 lbf-in

產品編號 Item No.	精度 Accuracy	方頭 Drive	方凹頭 Drive Hole	顯示及設定範圍 Setting Range	建議使用範圍 Suggested Range	解析度 Resolution	顯示器尺寸 Size(mm) (L x W x H)	顯示器重量 Weight(g)
WS-60-2	CW:±1.5%	3/8"	3/8"	3~60 Nm	9~60 Nm	0.01 Nm	75 x 42 x 39	189
WS-135-2				6.8~135 Nm	20~135 Nm	0.1 Nm		
WS-200-3	CCW:±2.5%	1/2"	1/2"	10~200 Nm	30~200 Nm			
WS-340-3				17~340 Nm	50~340 Nm			

註：精度的扭力範圍在最大操作值的20%~100%

Notes: Accuracy guaranteed at 20% to 100% of full scale.

WS-A340-3



- 數位扭力轉接頭，接上一般或機械式棘輪扳手，即成為數位扭力扳手
- 鎖固時，可量測旋轉多少角度的功能
- 配件：收納用鐵製工具箱x1, 出廠校驗報告(符合ISO品質認證規範)x1, 說明書(中/英)x1, AAA電池x2, L型六角扳手(更換電池用)x1
- To connect any traditional ratchet wrench or hand socket wrench, it can be digital torque wrench.
- Can measurement the degree after tighten the screw or nut.
- Content : Storage steel box x1, Certificate of calibration report (Using ISO specification) x1, User guide (Bilingual) x1, L-type hex key wrench (replace the battery) x1

SPECIFICATIONS:

※Unit Conversion : 1 Nm = 10.2 kgf-cm = 0.738 lbf-ft = 8.851 lbf-in

產品編號 Item No.	精度 Accuracy	方頭 Drive	方凹頭 Drive Hole	顯示及設定範圍 Setting Range	建議使用範圍 Suggested Range	解析度 Resolution	顯示器尺寸 Size(mm) (L x W x H)	顯示器重量 Weight(g)
WS-A135-2	CW:±1.5% CCW:±2.5%	3/8"	3/8"	6.8~135 Nm / 0.1°~360°	20~135 Nm	0.1 Nm / 0.1°	75 x 50 x 39	210
WS-A200-3		1/2"	1/2"	10~200 Nm / 0.1°~360°	30~200 Nm			
WS-A340-3				17~340 Nm / 0.1°~360°	50~340 Nm			

註：精度的扭力範圍在最大操作值的20%~100%

Notes: Accuracy guaranteed at 20% to 100% of full scale.

扳手校正機 *Torque Calibration System*

- 可透過傳感器對扭力扳手進行校正，確認扭力扳手精準度
 - 蜂鳴器、LED燈警示（到達預設扭力值80%時）
 - 超過設定值101%時，錶頭背景由藍光轉紅光，蜂鳴聲保持聲響
 - 四種單位選擇 N-m, ft-lb, in-lb, kgf-cm
 - 30組扭力預設值
 - 峰值保持(P) 與扭力追隨(T)模式
- ※不得用於電動扳手或氣動扳手※



- Calibrate the torque wrench using a sensor to verify its accuracy
 - Warning function : Beep, LED indicator. (When reach the torque setting value 80%)
 - The backlight changes from blue to red, and the buzzer continues to sounds (When reach the torque setting value 101%)
 - Four torque units are available : N-m, ft-lb, in-lb, kgf-cm
 - Can store 30 memory setting values
 - Two modes : Track /Peak
- ※Not for air wrench and electric wrench.※

② 傳感器 Sensor

※ 扳手用

檢測範圍從0.05Nm到1200Nm，需根據不同的扭力選購對應的傳感器

For Torque Wrench Calibration

Measurement range from 0.05Nm to 1200Nm.

Select the appropriate sensor based on the required torque



※ 顯示器

附贈底座可插入顯示器進行使用(請參考31~32頁)

For Adapter Calibration (Please refer to P.31~32)

Includes a base for integrating with a adapter



③ 桌上型扭力測試架 Torque Test Stand

三種尺寸，根據扳手長度選購合適的測試架

Three sizes, selectable based on wrench length



① 錶頭 Meter

充電式設計，單一錶頭可連接多種型號的傳感器
Rechargeable design, compatible with various sensor models

校正機台組合為：① + ② + ③

Torque calibration system : ① + ② + ③



錶頭+傳感器，買即送防震工具箱
Meter+Sensor, Buy and get a shockproof toolbox for free



配件：說明書(中/英)x1, Type-C to C訊號傳輸線x1, USB to Type-C充電線x1

Content : User guide(Bilingual) x1, Type-C to C Signal Transmission Cable x1, USB to Type-C Charging Cable x1

SPECIFICATIONS:

產品編號 Item No.	顯示及設定範圍 Setting Range	解析度 Resolution	尺寸 Size (cm) L x W x H	重量 Weight(kg)	適用產品 Apply to
WC-S1-C	依照傳感器規格 According to sensor specifications		17.2 x 13.5 x 2	0.39	WC-SS series

WC-SS Series
扭力傳感器 Torque Sensor


配件：防震工具箱x1, 出廠校驗報告(符合ISO品質認證規範)x1

Content：Anti-shock tool box x1, Certificate of calibration report (Using ISO specification) x1

SPECIFICATIONS:

※Unit Conversion：1 Nm = 100 cNm = 10.2 kgf-cm = 0.738 lbf-ft = 8.851 lbf-in


產品編號 Item No.	精度 Accuracy	顯示及設定範圍 Setting Range	校正範圍 Calibration Range	方頭 Drive(inches)	解析度 Resolution	尺寸 Size (cm) (L x W x H)	重量 Weight (kg)	
WC-SS5-1	CW:±0.5% CCW:±1%	※5-500 cNm	※25-500 cNm	1/4"	0.1 cNm	9.3 x 9.3 x 7.9	0.73	
WC-SS10-1		0.1~10 Nm	0.5~10 Nm		0.01 Nm			
WC-SS50-1		0.5~50 Nm	2.5~50 Nm					
WC-SS80-2		0.8~80 Nm	4~80 Nm	3/8"	0.1 Nm	9.4 x 9.4 x 8	1.04	
WC-SS160-2		1.6~160 Nm	8~160 Nm					
WC-SS250-3		2.5~250 Nm	12.5~250 Nm	1/2"			1.03	
WC-SS450-3		4.5~450 Nm	22.5~450 Nm					
WC-SS650-4		6.5~650 Nm	32.5~650 Nm	3/4"		11.0 x 11.0 x 10.4	1.96	
WC-SS850-4		8.5~850 Nm	42.5~850 Nm					
WC-SS1200-5			12~1200 Nm	60~1200 Nm	1"	1 Nm	11.7 x 11.7 x 15.5	3.2

註：精度的扭力範圍在最大操作值的5%~100%

Notes: Accuracy guaranteed at 5% to 100% of full scale.

WC-LD Series

桌上型扭力測試架 Desktop Torque Test Stand

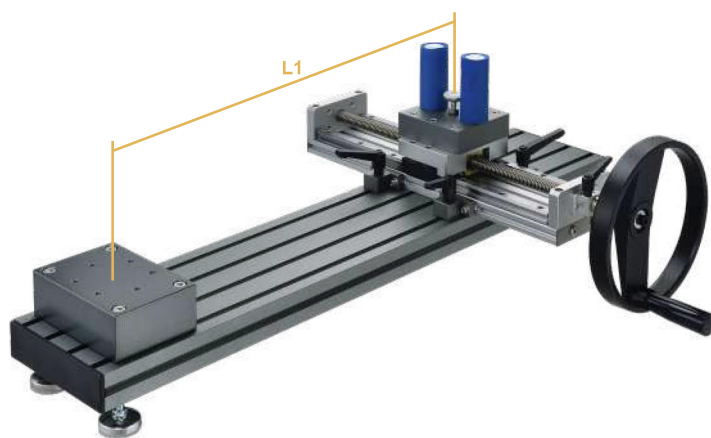

配件：開口扳手x1(固定腳座用), L型六角扳手x1(固定傳感器用), 氣泡水平儀x1

Content：Open-end wrench x1 (for fixing the base), L-shaped hex wrench x1 (for fixing the sensor), bubble level x1

SPECIFICATIONS:

產品編號 Item No.	L1 (cm)	尺寸 Size(cm) (L x W x H)	重量 Weight(kg)	配件 Accessories
WC-LD50	14.5~34	51 x 31.2 x 25.5	10.19	 1/4"
WC-LD80	14.5~65.5	81 x 60.5 x 25.6	13.78	 1/4" 3/8" 1/2"
WC-LD150	29.5~116	152 x 81.5 x 38	-	-

L1說明:

扳手校正點
Wrench calibration point



棘輪頭中心點
Ratchet head center point

註：L1為傳感器中心至扳手校正點的距離

Note: L1 represents the distance from the center of the sensor to the calibration point of the wrench.

memo



Lined area for writing the memo.