

GEDORE TORQUE SOLUTIONS



CORDLESS TORQUE WRENCH
WITH COLOUR DISPLAY

LDA/LAW SOLUTION

up to 6000 Nm



Dear customers, business partners,
and tool users,


GEDORE Torque Solutions GmbH is a **high-tech centre** for innovative product development and individual solutions in the field of **bolting technology**. The company has been part of the **GEDORE Group** since 2008 and has been trading under the name **GEDORE Torque Solutions** since 2016. Our own engineering department, a vertical range of manufacture of well over 90% on state-of-the-art machines and excellent service are a guarantee for Made in Germany.

Our proven high torque cordless torque wrench is now also available with a sunlight-readable colour display. The LDA Solution is your reliable partner for safety bolting requiring documentation.


GEDORE Torque Solutions has developed the series of **gate valve machines** especially for **gate valve assembly**. The gate valve machines are available with various accessories and are electrically and battery operated. Information on our gate valve machines is available from page 62 onwards.

We hope you enjoy browsing through the new catalogue.

YOUR GEDORE TORQUE SOLUTIONS GMBH TEAM OF EXPERTS

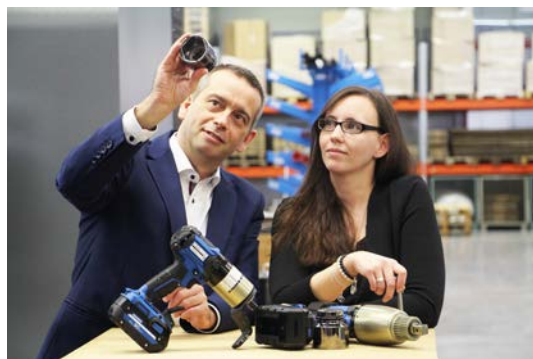

1		FOREWORD		3
2		CORDLESS TORQUE WRENCH GDA series LDA/LAW Solution series LDA, LAW series	60–200 Nm 90–6000 Nm 90–6000 Nm	8 10 14
3		ELECTRIC TORQUE WRENCH LDE/LEW series	90–13 000 Nm	20
		CRANE TORQUE WRENCH LEW-L series, LAW-L Solution, LAW-L	1100–9500 Nm	25
4		PNEUMATIC TORQUE WRENCH LPK series LPK-X series	80–12 800 Nm 80–4200 Nm	28 30
5		HYDRAULIC SOLUTIONS LDH, LDK series Hydraulic Units	60–27 000 Nm 800 bar	34 40
6		MANUAL SOLUTIONS LKV series LKS series	50–54 000 Nm RSW 32–115 mm	44 50
7		BOLTING SOFTWARE Documentation module TRACK, quality management module QS		52
8		TORQUE TESTING BENCH TECHNOLOGY LTC series	100–5 000 Nm	56
9		SPECIAL SOLUTIONS For customer specific requirements and different industrial sectors		62
10		COMPANY AND SERVICES The company and its services at a glance Quality management · company history · GEDORE Torque Solutions worldwide		72

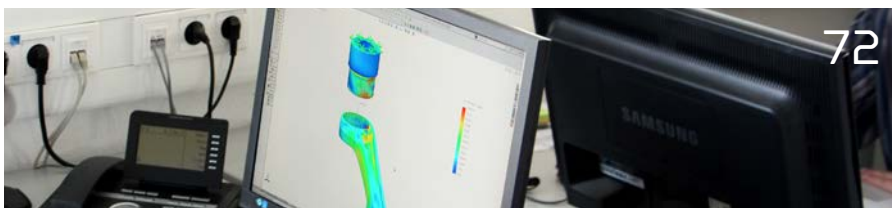



1. Gang		2. Gang	
1	1050 Nm	1	440 Nm
2	1363 Nm	2	508 Nm
3	1684 Nm	3	611 Nm
4	2005 Nm	4	808 Nm
5	2326 Nm	5	929 Nm
6	2647 Nm	6	1050 Nm
7	2968 Nm	7	1166 Nm

GDA, LDA/LAW SOLUTION, LDA/LAW CORDLESS TORQUE WRENCH



GDA



SCOPE OF DELIVERY

- › DEVICE
- › REACTION ARM CRANKED
- › 2 BATTERIES
- › CHARGER
- › TOOL BOX
- › OPERATING MANUAL
- › FACTORY CALIBRATION CERTIFICATE



LDA/LAW SOLUTION

SCOPE OF DELIVERY



- › DEVICE
- › REACTION ARM CRANKED
- › 3 BATTERIES
- › CHARGER
- › TOOL BOX
- › OPERATING MANUAL
- › FACTORY CALIBRATION CERTIFICATE



LDA/LAW

SCOPE OF DELIVERY



- › DEVICE
- › REACTION ARM CRANKED
- › 3 BATTERIES
- › CHARGER
- › TOOL BOX
- › OPERATING MANUAL
- › FACTORY CALIBRATION CERTIFICATE



THE COMPACT CORDLESS TORQUE WRENCH

SERIE GDA, 60-200 Nm

Own microprocessor
controlled switch-off electronics

Powerful 90 Wh (18 V/5 Ah)
lithium-Ion battery

Brushless Technology
low-maintenance

Torque values
readable on the label

Ergonomic grip microtexture over-
mould for safe & non-fatiguing use

Stepless variable adjustable

Repeatability $\pm 3\%$

Automatic device switch-off when torque
achieved. Wrench slackens (back off)
after torque is applied

With LED status signal

SPECIAL CALIBRATION
UP TO 300 NM OPTIONAL



Individual GEDORE factory
calibration certificate

The compact cordless torque wrench up to 200 Nm

The compact solution in low torque range.

With the new GDA we present our smallest cordless torque wrench for use in assembly, production and manufacturing.



The heart of the cordless torque wrench is the switch-off electronics with microprocessor control. This allows the tightening torque for each bolting operation to be precisely maintained and ensures stable torque accuracy over the entire discharging cycle of the battery.

With a repeatability of $\pm 3\%$, the torque is steplessly adjustable and the status of the bolted connection is visualised via the LED status signal.




Flexible use in various industries

The new GDA is the solution for small bolting cases in a wide range of applications. Thanks to its low weight, ergonomic design and size, it is perfect for all assembly work in the low torque range. Small, compact and battery operated, it can be used wherever torque accurate bolting is required. Also for applications in linear guidance.

An unbeatable combination

Battery technology and microprocessor electronics complement each other perfectly. Our microprocessor electronics increase and regulate the battery voltage. Thus, the battery life is extended and the torque is maintained during the entire Working cycle kept constant.

Technical Data

Typ	N-m min ^{*1} / max ^{*2}	lbf-ft min ^{*1} / max ^{*2}	~ U/min	■	Ø D mm	H mm	kg ^{*3}	
GDA	60-200	44-148	54	½"	63	221	2.9	

^{*1} Lowest torque in 2nd gear ^{*2} Maximum torque in 1st gear ^{*3} Without reaction arm with battery Battery: 740g
 Vibration is less than 2.5 m/s² Continuous sound pressure level corresponding to <78,7 dB (A)
 Further torque ranges on request. All rights reserved. Subject to modifications without prior notice.

Scope of Delivery

- › Device
- › Reaction arm, cranked, made of folded and high-strength sheet steel
- › 2x Lithium-ion battery (90 Wh/18 V/5 Ah)
- › Charger 220-240 V; 50/60 Hz or 110-120 V; 50/60 Hz
- › Tool box
- › Operating manual
- › Factory calibration certificate



Optional Accessories

- › Various attachments
- › Special calibration up to 300 Nm







The new cordless torque wrench with documentation module

The new cordless torque wrench LDA/LAW Solution, is equipped with a documentation module for quality assurance and a sunlight-readable, intuitively operated colour display. Pre-defining of different bolting operations with module DOCU is possible. With its powerful 90 Wh lithium-ion battery, microprocessor electronics and brushless technology, the LDA/LAW Solution has a torque range up to 6000 Nm. With the torque rotation angle controlled torque tightening process, perfectly defined bolted connections according to the highest quality standards are guaranteed.

Conforms to the highest standards

The data transfer of all bolt tightening operations via USB interface at the end of the working day is flawless and complete with the LDA Solution. An integrated counting mode for life and maintenance cycle reminds you of service and recalibration.


Optional bolting software and documentation module DOCU

With the documentation module DOCU the documentation of over 10,000 bolt connections possible. It also serves for quality assurance archiving of your completed bolting work.

Defined bolt connection with torque-angle controlled torque tightening

For a more precise tightening of the bolts, the LDA Solution offers the torque-angle torque tightening method. After the snug torque has been reached, the bolt is retightened by the previously determined further angle of rotation and thus guarantees a perfectly defined bolt connection according to the highest quality standards.

More information about documentation modules
see page 52/53

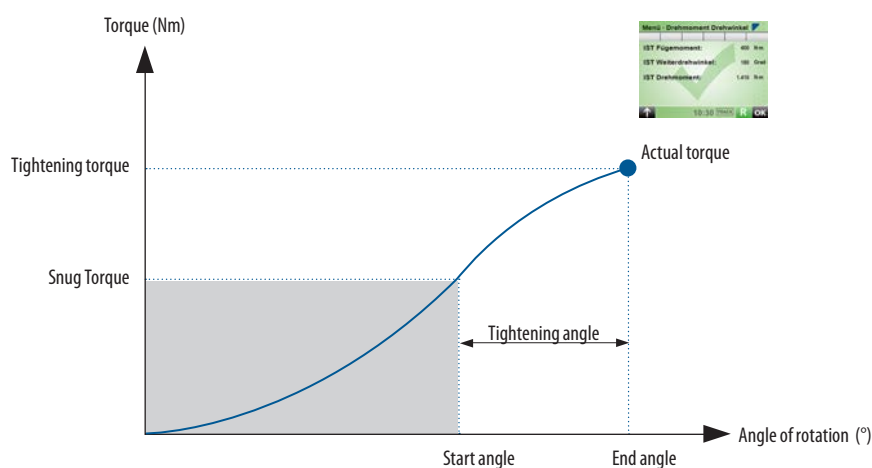

Menu · torque rotation angle			
ACTUAL joining moment: 300 N·m			
ACTUAL additional angle: 90 Degree			
ACTUAL torque: 1.410 N·m			
↑ 10:30 TRACK R OK			

Proven system sequence by means of digital color display



For maximum precision, the LDA Solution offers a visual and acoustic zero-defects strategy: a sunlight-readable, digital colour display visualises the entire work workflow; in addition, an acoustics signal sound as soon as the set value is reached. The menu language can be set optionally (German or English).

Lies comfortably in the hand

The ergonomic grip is non-slip and fatigue-free in the hand and ensures safe working. The 360° rotating drive unit prevents injuries to the operator when using in confined spaces.



The display and its functions:

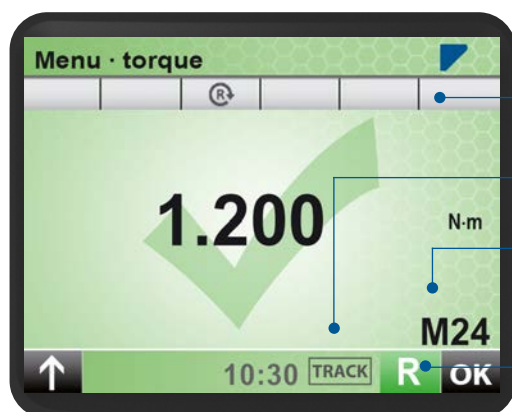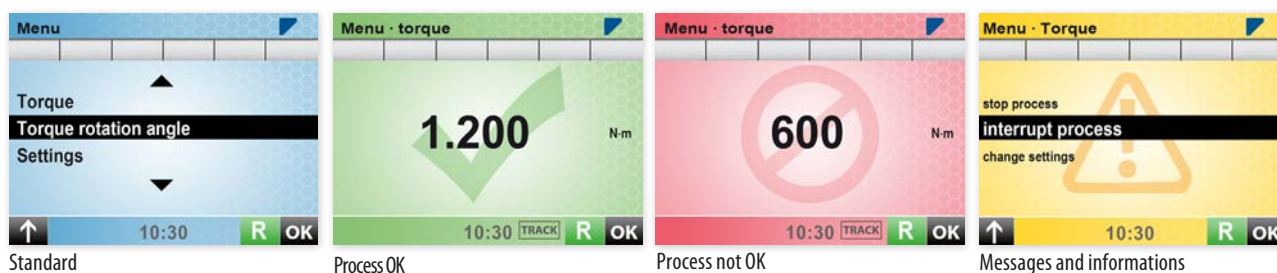


- + Toolbar shows status of the device (USB connection, thread direction, temperature)
- + Active module (TRACK or QS)
- + Typical bolt for adjusted torque
- + Direction of rotation




- + 2" high resolution LCD colour display with impact resistant macrolon protection screen
- + OK-button
- + Back-button
- + Setting wheel for easy selection of bolt cases and torque values
- + USB-interface for data transmission

Technical Data

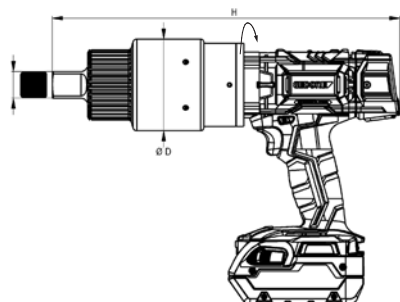

LDA Solution series – straight version

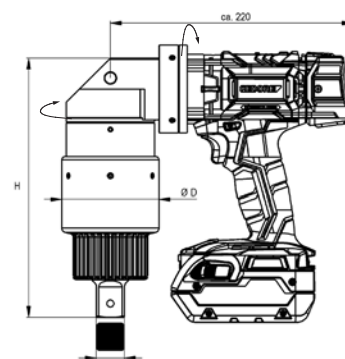

LAW Solution series – angled version

Typ	N-m min ^{*1} / max ^{*2}	lbf-ft min ^{*1} / max ^{*2}	~ U/min	■	Ø D mm	H mm	kg ^{*3}
LDA-05 Solution	90 - 500	66 - 369	46	3/4"	80	294	3.4
LDA-07 Solution	120 - 700	86 - 516	29	3/4"	80	326	4.0
LDA-12 Solution	200 - 1.200	148 - 885	20	3/4"	80	326	4.0
LDA-15 Solution	250 - 1.500	184 - 1107	15	1"	88	342	5.1
LDA-22 Solution	300 - 2.200	221 - 1623	10	1"	90	360	5.7
LDA-32 Solution	400 - 3.200	290 - 2360	7	1"	88	383	6.2
LDA-40 Solution	500 - 4.000	369 - 2950	5,5	1"	88	383	6.2
LDA-60 Solution	700 - 6.000	516 - 4425	3,5	1 1/2"	102	398	7.9
LAW-12 Solution	200 - 1.200	148 - 885	20	3/4"	80	223	5.3
LAW-22 Solution	300 - 2.200	221 - 1623	10	1"	90	255	7.0
LAW-32 Solution	400 - 3.200	332 - 2360	7	1"	88	279	7.4
LAW-40 Solution	500 - 4.000	290 - 2360	5,5	1"	88	279	7.4
LAW-60 Solution	700 - 6.000	510 - 4425	3,5	1 1/2"	102	295	9.2

^{*1} Lowest torque in 2nd gear
Vibration is less than 2.5 m/s²

^{*2} Maximum torque in 1st gear

Continuous sound pressure level corresponding to < 78.7 dB (A)

^{*3} Without reaction arm with battery

Battery: 740g

Further torque ranges on request. All rights reserved. Subject to modifications without prior notice.



Scope of delivery

- › Device
- › Handle (from LAW-60 Solution)
- › reaction arm, cranked, with lock on function made of chrome-vanadium steel
- › 3x Lithium-ion battery (90 Wh/18 V/5 Ah)
- › Charger 220–240 V; 50/60 Hz or 110-120V; 50/60 Hz
- › Tool box
- › Operation manual
- › Factory calibration certificate

Optional accessories

- › Reaction arm made of light alloy, straight with adjustable locking knob with movable square-end and retaining ring
- › Reaction ring for welding on
- › Car charger for 12 V connection
- › Function LA.M+a (fom construction size -12*)
- › Module LA.DOCU
- › Silicone protection cover display unit



*for LDA/LAW -12 Solution and -15 Solution function only possible in 1st gear



*Illustration similar



See for yourself
– take a look at our new
LDA-Video!

The new cordless torque wrench up to 6000 Nm

Even more powerful, intelligent and flexible - and at the same time much smaller and lighter than its predecessor: The new generation of LDA cordless torque wrench with ergonomic grip and low-maintenance brushless technology. With our further developed and proven high level cordless torque wrench, bolting operations can be carried out independently and safely.

It generates torques of up to 6000 Nm with specially manufactured planetary gearboxes. The powerful lithium-ion battery mean that applications at high altitude or in confined spaces are easy overcome.



Our secret: Intelligent microprocessor electronics

The heart of the cordless torque wrench is the switch-off electronics with microprocessor control. This allows the tightening torque for each bolting operation to be precisely maintained and ensures stable torque accuracy over the entire discharging cycle of the battery.

Integrated gear protection and processor-controlled safety

The microprocessor prevents gear damage when loosening hard bolted connections. The low-backlash gear with a housing made of high-performance aluminium was specially developed further for this series. An active release function ensures that the wrench automatically releases after work is complete and can thus be easily removed from the bolt.

An unbeatable combination

Battery technology and microprocessor electronics complement each other perfectly. Our microprocessor electronics increases and regulates the battery voltage. Thus, the battery life is extended and the torque kept constant during the operating cycle.

The scope of delivery of the cordless torque wrench includes a system performance of 270 Wh, consisting of three lithium-ion batteries (90 Wh/18 V/5 Ah).


With the latest Brushless Technology, the LDA becomes even more efficient. The brushless motor replaces the brushed universal motor and thus requires less maintenance.

Lies comfortably in the hand


The ergonomic grip is non-slip and fatigue-proof in the hand and ensures safe working. The braked 360°-rotating drive unit prevents any injuries to the operator when used in confined spaces.



Technical data

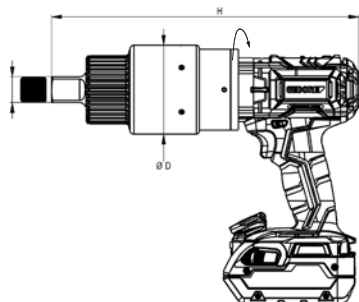

LDA series – straight version



LAW series – angled version

Type	N·m min ^{*1} /max ^{*2}	lbf·ft min ^{*1} /max ^{*2}	~ U/min		Ø D mm	H mm	kg ^{*3}
LDA-05	90 - 500	60 - 370	46	3/4"	80	255	3.3
LDA-07	120 - 700	80 - 520	29	3/4"	80	287	3.9
LDA-12	200 - 1200	150 - 890	20	3/4"	80	287	3.9
LDA-15	250 - 1500	180 - 1110	15	1"	88	303	5.0
LDA-22	300 - 2200	220 - 1630	10	1"	90	321	5.6
LDA-32	400 - 3200	290 - 2360	7	1"	88	344	6.1
LDA-40	500 - 4000	370 - 2950	5,5	1"	88	344	6.1
LDA-60	700 - 6000	510 - 4430	3,5	1 1/2"	102	359	7.8
LAW-12	200 - 1200	150 - 890	20	3/4"	80	223	5.2
LAW-22	300 - 2200	220 - 1630	10	1"	90	255	6.9
LAW-32	400 - 3200	290 - 2360	7	1"	88	279	7.3
LAW-40	500 - 4000	370 - 2950	5,5	1"	88	279	7.3
LAW-60	700 - 6000	510 - 4425	3,5	1 1/2"	102	295	9.1

^{*1}Lowest torque in 2nd gear^{*2}Maximum torque in 1st gear^{*3}Without reaction arm with battery

Battery: 740g

Vibration is less than 2.5 m/s²

Continuous sound pressure level corresponding to <78,7 dB (A)

Further torque ranges on request. All rights reserved. Subject to modifications without prior notice.



Scope of delivery

- › Device
- › Hand grip (from LAW-60 see page 21)
- › Reaction arm cranked with lock on function made of chrome vanadium steel
- › 3x Lithium-ion battery (90 Wh/18 V/5 Ah)
- › Charger 220-240 V; 50/60 Hz or 110-120 V; 50/60 Hz
- › Tool box
- › Operating instructions
- › Factory calibration certificate



*USA: Illustration similar

Optional accessories

- › Reaction arm made of light alloy, straight with adjustable locking knob with movable square-end and retaining ring
- › Reaction ring for bespoke reaction arm design
- › Car charger for 12 V connection



*Illustration similar

OUR TORQUE WRENCH IN DIFFERENT BOLTING SITUATIONS

i



Source: MERK Timber GmbH



Metropol Parasol, Sevilla

The new landmark in Seville, Spain, was mounted with the high-torque cordless torque wrench (LDA). A total of 21900 bolted connections were tightened on the wooden construction.

Rhenish lignite mining area

In the Rhenish lignite mining area, complex piping systems run through the openpit mining, which serve for drainage and pollution control. In some areas, steel flanged pipes are being dismantled, which have been used for over 10 years of drainage and installed in the ground. Due to the years of weathering and the resulting corrosion of the bolt connections, disassembly work is often a challenge for these tubes. To solve these bolted connections and to install new lines our LDA is used.



Source: RWE POWER, TAGEBAU HAMBACH



Football stadium TSG Hoffenheim

The roof structure of the football stadium belonging to TSG 1899 Hoffenheim was mounted with our cordless torque wrench.



LDE, LEW

ELECTRIC TORQUE WRENCH

LDE



SCOPE OF DELIVERY

- › DEVICE
- › REACTION ARM CRANKED
- › TOOL BOX
- › OPERATING MANUAL
- › FACTORY CALIBRATION CERTIFICATE



LEW



SCOPE OF DELIVERY

- › DEVICE
- › REACTION ARM CRANKED
- › TOOL BOX
- › OPERATING MANUAL
- › FACTORY CALIBRATION CERTIFICATE



THE ELECTRIC TORQUE WRENCH

LDE/LEW SERIES, 90 - 13000 Nm

High input voltage and frequency range (200-260V, 47-63Hz), designed for international use



Electronic R/L switching function



Torque values readable on the label

Digital display with visual-acoustic operator guidance for even simpler operation



Optional:
Torque rotation angle mode

Planetary gear unit with Ceramic-Teflon®-coated tooth flanks



Supplied with individual GEDORE factory calibration certificate



LEW series



Resistant gear unit combined with intelligent electronics

Setting new standards with the robust gear unit housing and intelligent electronics under the display: Service functions such as overload and recalibration are displayed to the user. In default, the display shows the torque level. In addition, if required, the display can be changed from torque level to torque value.



Reliable documentation of results with the bolting module TRACK

The classical electric high-level torque wrench is also available with the TRACK documentation function.

Designed for the toughest construction site applications, the inductive data transmission system is used for non-contact transfer of your data to the laptop/PC where you can conveniently edit them further.

Further functions (optional)

Optionally, the electric torque wrench, which is available in straight and angled versions, can be upgraded with a data read-out function, the torque-rotation angle mode and the Nm display function.



More information about
documentation modules
see pages 52/53



The display and its functions:

Torque mode



5 digit display



Gear display



Select button



Potentiometer wheel
for torque settings
and menu navigation



Inductive interface



Torque angle rotation mode



Unit display



Enter key



Rotation direction LED
to indicate drive direction

HAND GRIP



From version size LDE-70, the electric torque wrench is supplied with a rotating hand grip to facilitate the easy operation of the device.



The hand grip is included from size LEW-60 for the angled electric torque wrenches.



Scope of delivery

- › Device
- › Hand grip (from LDE-70/LEW-60)
- › Reaction arm cranked with lock on function made of chrome vanadium steel
- › Tool box
- › Operating instructions
- › Factory calibration certificate




Optional accessories


- › Reaction arm made of light alloy, straight with adjustable locking knob with movable square-end and retaining ring
- › Reaction ring for bespoke reaction arm design
- › Module LE.TRACK
- › Function LA.M+a (from construction size -15)



Technical data

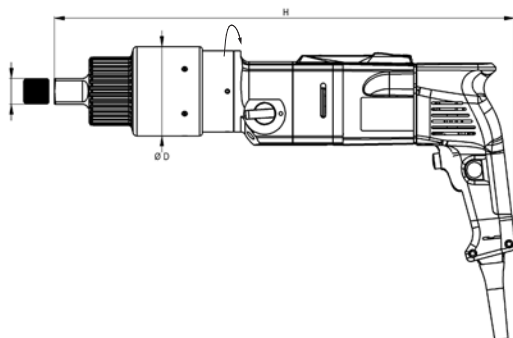

LDE series – straight version

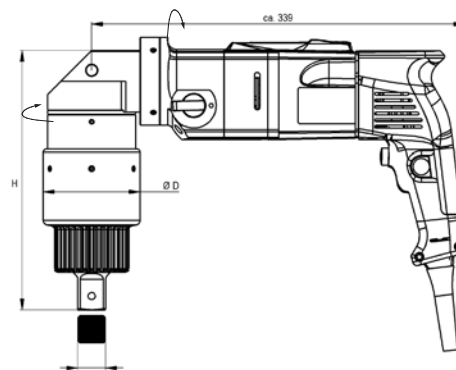

LEW series – angled version

LDE series - straight version

Type	N·m min ^{*1} /max ^{*2}	lbf·ft min ^{*1} /max ^{*2}	~ U/min	■	Ø D mm	H mm	kg ^{*3}
LDE-05	90 - 500	70 - 370	44	3/4"	80	405	4.5
LDE-075	100 - 750	80 - 550	22	3/4"	80	439	5.0
LDE-15	250 - 1500	180 - 1110	20	1"	88	455	6.1
LDE-28	350 - 2800	260 - 2050	6	1"	88	495	7.3
LDE-40	500 - 4000	370 - 2950	5	1"	88	495	7.3
LDE-60	700 - 6000	520 - 4400	3.5	1 1/2"	102	515	9.2
LDE-70	850 - 7500	630 - 5500	3	1 1/2"	128	531	12.1
LDE-90	1100 - 9000	810 - 6600	2.5	1 1/2"	142	542	14.0
LDE-120	1600 - 13 000	1180 - 9500	2	1 1/2"	174.5	560	20.0

^{*1} Lowest torque in 2nd gear ^{*2} Maximum torque in 1st gear
Continuous sound pressure level corresponding to <78,7 dB (A)

^{*3} Without reaction arm Vibration is less than 2.5 m/s²
Further torque ranges on request. All rights reserved. Subject to modifications without prior notice.

LEW series - angled version

Type	N·m min ^{*1} /max ^{*2}	lbf·ft min ^{*1} /max ^{*2}	~ U/min	■	Ø D mm	H mm	kg ^{*3}
LEW-05	90 - 500	70 - 370	44	3/4"	80	187	5.8
LEW-075	100 - 750	80 - 550	22	3/4"	80	220	6.4
LEW-15	250 - 1500	180 - 1110	20	1"	88	236	7.3
LEW-28	350 - 2800	260 - 2050	6	1"	88	276	8.6
LEW-40	500 - 4000	370 - 2950	5	1"	88	276	8.6
LEW-60	700 - 6000	520 - 4400	3.5	1 1/2"	102	296	10.7
LEW-70	850 - 7500	630 - 5500	3	1 1/2"	128	311	12.9
LEW-95	1100 - 9500	810 - 7000	2.5	1 1/2"	142	323	14.6
LEW-120	1600 - 13 000	1180 - 9500	2	1 1/2"	174.5	340	20.6

^{*1} Lowest torque in 2nd gear ^{*2} Maximum torque in 1st gear
Continuous sound pressure level corresponding to <78,7 dB (A)

^{*3} Without reaction arm Vibration is less than 2.5 m/s²
Further torque ranges on request. All rights reserved. Subject to modifications without prior notice.

THE STEEL STRUCTURE TORQUE WRENCH

The steel structure torque wrench must be light but robust in design for the assembly of bridges or steel construction projects.
We are prepared for such situations.
Decades of experience and development work, combined with the known high quality requirements, are clearly demonstrated by the torque wrenches in this range. As with all series devices, you can rely on the acknowledged torque precision of these special versions.



Technical data

Type	N·m min*1/ max*2	lbf·ft min*1/ max*2	~ U/min	■	Ø D mm	H mm	kg*3
LDE-09ST	120 - 900	90 - 670	19.0	3/4"	80	439	5.2
LDE-16ST	300 - 2200	220 - 1620	7.0	1"	88	472	6.6
LDE-28ST	450 - 3200	330 - 2360	6.1	1"	88	495	7.3
LEW-09ST	120 - 900	90 - 670	19.0	3/4"	80	220	6.5
LEW-16ST	300 - 2200	220 - 1620	7.0	1"	88	253	7.9
LEW-28ST	450 - 3200	330 - 2360	6.1	1"	88	276	8.6

*1 Lowest torque in 2nd gear
Continuous sound pressure level corresponding to <78,7 dB (A)

*2 Maximum torque in 1st gear

*3 Without reaction arm

Vibration is less than 2.5 m/s²
Further torque ranges on request. All rights reserved. Subject to modifications without prior notice.

Steel Structure Torque Wrench

LDE-/LEW-09ST; Tightening of HV-connections from M12 to M24 (10.9)
LDE-/LEW-16ST; Tightening of HV-connections from M16 to M30 (10.9)
LDE-/LEW-28ST; Tightening of HV-connections from M20 to M36 (10.9)



THE CRANE TORQUE WRENCH

There are applications where torque wrenches have to provide even more power. This includes crane assembly at great heights. The devices in L-version are specially designed for the HV bolted connections on the tower sections of the Liebherr HC and EC models.

We also offer the complete package here for the demanding user. Starting from the gear unit diameter precisely matched to the tower section and conical impact sockets right up to the appropriate reaction arm made of high-performance aluminium.

In addition, higher loosening torques for disassembly, as well as special equipment and torque settings for other crane manufactures are available.



Technical data

Type	N·m min ^{*1} / max ^{*2}	lbf·ft min ^{*1} / max ^{*2}	~ U/min	■	Ø D mm	H mm	kg ^{*3}
LEW-60L	1.200 - 6.500	880 - 4800	3.5	1 1/2"	102	296	10.7
LEW-75L	1.840 - 7.500	1360 - 5535	1.6	1 1/2"	102	317	12.0
LEW-95L	1.100 - 9.500	810 - 7000	2.2	1 1/2"	138	324	17.7
LAW-75L	950 - 7.500	1387 - 5532	2.6	1 1/2"	102	295	11.5
LAW-75L Solution	950 - 7.500	1387 - 5532	2.6	1 1/2"	102	295	11.6

^{*1} Lowest torque in 2nd gear

^{*2} Maximum torque in 1st gear
Continuous sound pressure level corresponding to <78,7 dB (A)

^{*3} Without reaction arm

Vibration is less than 2.5 m/s²

Further torque ranges on request. All rights reserved. Subject to modifications without prior notice.

Also available as a Heavy Duty version. LEW-60L with increased torque.



Scope of delivery LEW-L/LAW-L

- › Device
- › Hand grip
- › Reaction arm, HC-Design
- › Tool box
- › Operating instructions
- › Factory calibration certificate



Optional accessories

- › Reaction arm EC-Design
- › SL type impact socket
- › Module LE.TRACK (at LEW)
- › Module LA.DOCU (at LAW Solution)





LPK, LPK-X

PNEUMATIC TORQUE WRENCH

LPK



SCOPE OF DELIVERY

- › DEVICE
- › REACTION ARM CRANKED
- › TOOL BOX
- › OPERATING MANUAL
- › FACTORY CALIBRATION CERTIFICATE



LPK-X



SCOPE OF DELIVERY

- › DEVICE
- › REACTION ARM CRANKED
- › TOOL BOX
- › OPERATING MANUAL
- › FACTORY CALIBRATION CERTIFICATE



THE PNEUMATIC TORQUE WRENCH

LPK SERIES, 80 - 12800 Nm





Quiet and accurate torque - even from just 1.5 bar operating pressure


The pneumatic torque wrench functions without vibrations, thus protects the user. Hands on vibration and noise levels are significantly reduced with the GEDORE Torque Solutions GmbH pneumatic torque wrenches. The force is transmitted quietly and precisely from just 1.5 bar operating pressure via the proven high-performance gear unit to the bolt connection.

Robust pneumatic torque wrench for a wide range of environments

Because of the continuously generated overpressure in the device, the pneumatic torque wrench is particularly resistant when used in extremely dirty or dusty environments. Pressure fluctuations in the supply network are effectively compensated for by the proven maintenance unit comprising of an air filter, oiler and pressure reducers. The device is supplied with a constantly uniform airflow and the torque is constantly maintained.



Technical data

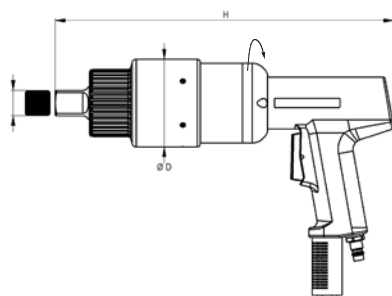

LPK series— pneumatic

Type	N-m min ^{*1} /max ^{*2}	lbf-ft min ^{*1} /max ^{*2}	~ U/min	■	Ø D mm	H mm	kg ^{*3}
LPK-05	80 - 450	60 - 330	55	3/4"	80	295	3.0
LPK-09	200 - 900	150 - 670	24	3/4"	80	328	3.2
LPK-15	300 - 1500	220 - 1110	12	1"	88	343	4.7
LPK-22	500 - 2200	370 - 1620	7	1"	88	360	5.1
LPK-32	800 - 3200	590 - 2360	4	1"	88	383	5.8
LPK-40	850 - 4200	620 - 3100	4	1"	88	383	5.8
LPK-60	1200 - 6000	880 - 4400	4	1 1/2"	102	400	7.7
LPK-70	1500 - 7000	1110 - 5160	3	1 1/2"	128	416	10.6
LPK-95	2000 - 9500	1470 - 7000	2.5	1 1/2"	142	431	12.5
LPK-120	2500 - 12 800	1840 - 9440	1.5	1 1/2"	174.5	448	18.5

^{*1} Lowest torque at 1.5 bar ^{*2} Maximum torque at 8 bar
Continuous sound pressure level corresponding to 84 dB (A)

^{*3} Without reaction arm Vibration is less than 2.5 m/s² At 8 bar ca. 1400 l/min.
Further torque ranges on request. All rights reserved. Subject to modifications without prior notice.

THE PNEUMATIC TORQUE WRENCH

LPK-X SERIES, 80 - 4200 Nm

Braked 360°-rotating motor unit for comfortable working with optimal operator safety

Torque values readable on the label

Low-backlash high-performance gear unit for reliable, long-term operation

Reduced size and compact construction for extremely confined spaces

Supplied with individual GEDORE factory calibration certificate

Rocker switch for simple change of rotation direction

2-speed planet gear unit for up to 7-fold faster tightening speed



Scope of delivery

- > Device
- > Reaction arm cranked with lock on function made of chrome vanadium steel
- > Tool box
- > Operating instructions
- > Factory calibration certificate

Optional accessories

- > Reaction arm made of light alloy, straight with adjustable locking knob with movable square-end and retaining ring
- > Reaction ring for bespoke reaction arm design
- > Hose (4m)
- > Maintenance unit






Up to 7 times higher bolting speed

The LPK-X series has a 2-speed planet gear unit. The user can therefore select between rapid and torque mode. The rapid mode drives the bolt in up to the joining torque with a speed up to 300 rpm. It is then possible to switch to the torque mode that tightens the bolt to the precise torque required. Once the required torque has been achieved, the device switches off automatically.

If a torque wrench is not available, bolt connections are usually pre-tightened and then finished off with a torque wrench. These two working steps are combined in the LPK-X, saving working time for the user. In extensive on-site applications, the assembly times can be reduced by up to 30% through the combination of two working steps in one device with the LPK-X.



Technical data

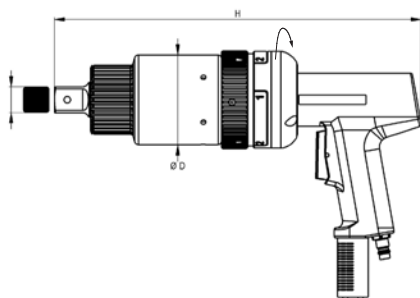

LPK-X series – pneumatic

Typ	N·m min ^{*1} /max ^{*2}	lbf·ft min ^{*1} /max ^{*2}	~ U/min ^{*3}	■	Ø D mm	H mm	kg ^{*4}
LPK-05 X	80 - 450	60 - 330	300	¾"	80	301	3.0
LPK-09 X	200 - 900	150 - 670	100	¾"	88	333	4.0
LPK-22 X	500 - 2200	370 - 1620	30	1"	88	367	5.5
LPK-32 X	800 - 3200	590 - 2360	25	1"	88	390	6.2
LPK-40 X	850 - 4200	620 - 3100	20	1"	88	390	7.0

^{*1} Lowest torque in 1st gear at 1.5 bar
At 8 bar ca. 1400 l/min. All rights reserved.
Further torque ranges on request. All rights reserved. Subject to modifications without prior notice.

^{*2} Maximum torque in 1st gear at 8 bar
Vibration is less than 2.5 m/s²

^{*3} Maximum speed in 2nd gear
Continuous sound pressure level corresponding to 84 dB (A)

^{*4} Without reaction arm



LDH, LDK, LHU

HYDRAULIC SOLUTIONS

LDH



SCOPE OF DELIVERY

- › DEVICE INCL. SQUARE DRIVE AND COUNTER BEARING
- › TOOL BOX
- › TORQUE-SETTING-TABLE
- › OPERATING MANUAL



LDK



SCOPE OF DELIVERY

- › DEVICE
- › TOOL BOX
- › TORQUE-SETTING-TABLE
- › OPERATING MANUAL



LHU



SCOPE OF DELIVERY

- › DEVICE OIL-FILLED
- › CONTROL (M/A OR S)
- › OPERATING MANUAL



THE HYDRAULIC TORQUE WRENCH

LDH SERIES, 60 - 27000 Nm

Integrated relief valve in the hydraulic connection increases work safety



360° rotating hydraulic connection under load for flexible bolting work



Reduced size and compact construction for extremely confined spaces



Quick-change mechanism for rapid shifting of the reaction arm



Super-light high performance aluminium for rugged and ergonomic handling



Various inserts as accessories for flexible working



Counter bearing with push button allows quick replacement of various inserts



Optional: Hydraulic connection in 360° x 180° swiveling design



Optional: Inclined connection




Scope of delivery

- › Device
- › Square drive
- › Counter bearing
- › Tool box
- › Torque-setting-table
- › Operating instructions



Optional accessories

- › Allen screw
- › Toothed impact sockets and special inserts on request
- › Different reaction arms (look p. 36)
- › Hydraulic connection in 360° x 180° swiveling design (see above)
- › Inclined connection (see above)

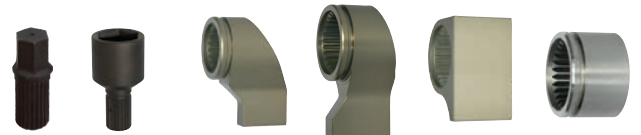



Light, easy to handle and with high torque

The LDH is used where space is limited but high torque is required. In order to facilitate bolting operations for the user, the hydraulic torque wrench series has been designed with high-performance aluminium and subject to continuous improvements.

The size has therefore been constantly reduced while more and more features have been included to make the difficult work easier for the user.


An integrated relief valve ensures working safety and the flow-optimised, generously dimensioned oil channels reduce heating up of the device during high continuous loads to a minimum.

The perfect combination

Together with our hydraulic units, the hydraulic torque wrenches achieve a maximum in work performance. Both components together create an excellent synergy of user-friendliness and operating convenience.



Technical Data

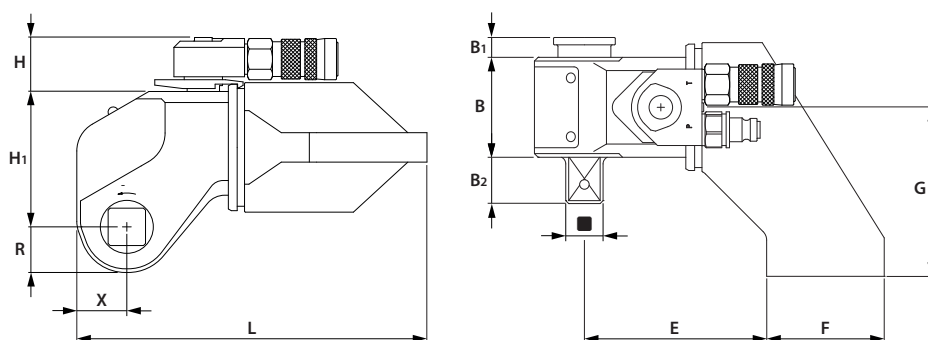

Series LDH – hydraulic

Type	N-m min/ max ^{*2}	lbf-ft min/ max ^{*2}	■	B mm	B ₁ mm	B ₂ mm	E mm ^{*3}	F mm ^{*3}	G mm	H mm	H ₁ mm	L mm ^{*3}	R mm	X mm	kg ^{*4}
LDH-12V ^{*1}	60 - 1200	45 - 880	3/4"	46	7	28	-/88	-/48	78	37	62	-/158	19	22	1.9
LDH-24V ^{*1}	120 - 2350	90 - 1730	3/4"	53	6	28	59/109	60/58	95	37	72	146/194	24	27	2.0
LDH-48V ^{*1}	230 - 4800	170 - 3500	1"	68	14	32	70/125	89/80	115	37	92	193/239	31	34	3.9
LDH-75V ^{*1}	400 - 7560	290 - 5570	1 1/2"	76	12	44	74/134	94/93	122	37	107	207/266	36	39	6.2
LDH-100V ^{*1}	500 - 10 000	370 - 7300	1 1/2"	84	13	39	85/150	105/99	130	37	115	233/292	39	43	7.8
LDH-170V	800 - 16 000	590 - 11800	1 1/2"	100	11	45	93/163	118/108	150	50	135	265/325	48	54	11.8
LDH-270V	1300 - 27 000	960 - 19900	2 1/2"	119	18	76	121/206	145/133	200	50	164	329/402	59	63	24.0

^{*1} Optional 360° rotating hydraulic connection ^{*2} Maximum torque at 800 bar ^{*3} Reaction arm type L(LM) / Reaction arm type S(LM) ^{*4} Without reaction arm
Vibration is less than 2.5 m/s² Continuous sound pressure level corresponding to <70 dB (A) All rights reserved. Subject to modifications without prior notice.

Allen screw - ISW


Type	ISW mm
LDH-12V	ISW 12V-14
	ISW 12V-17
	ISW 12V-19
LDH-24V	ISW 24V-14
	ISW 24V-17
	ISW 24V-19
	ISW 24V-22
	ISW 24V-24
LDH-48V	ISW 48V-17
	ISW 48V-19
	ISW 48V-22
	ISW 48V-24
	ISW 48V-27
	ISW 48V-30
	ISW 48V-32

Type	ISW mm
LDH-75V	ISW 75V-17
	ISW 75V-19
	ISW 75V-22
	ISW 75V-24
	ISW 75V-27
	ISW 75V-30
	ISW 75V-32
LDH-100V	ISW 100V-19
	ISW 100V-22
	ISW 100V-24
	ISW 100V-27
	ISW 100V-30
	ISW 100V-32
	ISW 100V-36


Type	ISW mm
LDH-170V	ISW 170V-27
	ISW 170V-30
	ISW 170V-32
	ISW 170V-36
	ISW 170V-41
	ISW 170V-46
LDH-270V	ISW 270V-36
	ISW 270V-41
	ISW 270V-46
	ISW 270V-50
	ISW 270V-55
	ISW 270V-60
	ISW 270V-65
	ISW 270V-70



Reaction arms

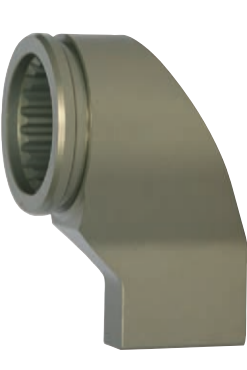

Reaction arm S (LM)
Standard design

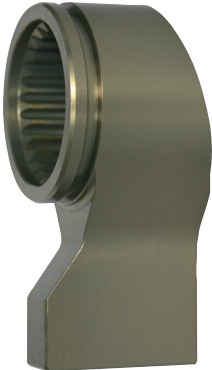

Reaction arm L (LM) (except LDH-12V)
Compact design



Reaction arm K (LM)
For embedded screws
and raised allen screws



Reaction sleeve RH (St)

THE CASSETTE WRENCH

LDK SERIES, 160 - 24000 Nm



Scope of delivery

- › Device
- › Tool box
- › Torque-setting-table
- › Operating instructions

Optional accessories

- › Retaining ring – HR and hexagon insert – SA
- › Exchangeable cassette - WK
Inch sizes on request
- › In-Out impact socket
- › Hydraulic connection
in 360° x 180° swiveling design (see above) for LDK-3 - LDK-12
- › Inclined connection (see above)





Simple loosening and precise tightening in confined spaces

Tight spots can become problem spots. In such situations, the LDK series is the ideal solution. Compact dimensions are paired here with high torques. The flat hexagon cassettes have been optimised for minimum radius and compact construction heights.




Simple operation and handling characterises the cassette torque wrench

The interchangeable cassettes can be rapidly and easily changed with the compression bolt technology. Different types of hydraulic connections enable adaptation to diverse bolting operations even in difficult to access points.

Economic in use

A separate cassette size is not always necessary for every wrench width. The installation spaces often leave enough room for the economic hexagon adapters. These are, like all the adaptations, locked in the corresponding interchangeable cassette with a holding ring so that they cannot be lost.

Technical data

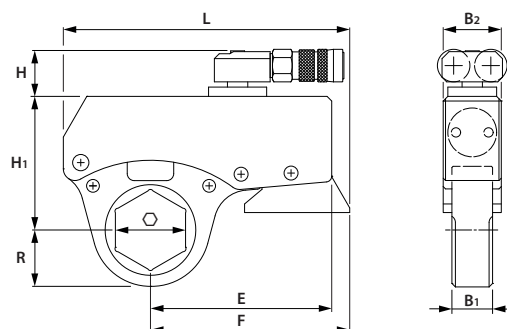

LDK series – hydraulic

Type	N·m min/max ^{*2}	lbf·ft min/max ^{*2}	⬡ mm	⬡"	B ₁ mm	B ₂ mm	E mm	F mm	H mm	H ₁ mm	L mm	R mm	⚖ ^{*3}
LDK - 3 ^{*1}	160 - 3300	120 - 2400	32 - 60	1 1/4" - 2 3/8"	28	40	137	145	39.2	91/103	205	28 - 48	1.6
LDK - 6 ^{*1}	350 - 6200	260 - 4500	41 - 80	1 5/8" - 3 1/8"	35	50	156	172	39.2	115/130	247	34 - 60	2.4
LDK - 12 ^{*1}	550 - 12 500	410 - 9200	55 - 100	2 3/16" - 3 7/8"	47	65	200	215	39.2	141/156	311	46 - 73	4.4
LDK - 24	1200 - 24 000	880 - 17 700	80 - 130	3 1/8" - 5"	56	82	245	260	50.0	182/202	385	62 - 96	8.2

^{*1} Optional 360° rotating hydraulic connection ^{*2} Maximum torque at 800 bar ^{*3} Without exchangeable cassette
 Continuous sound pressure level corresponding to <70 dB (A) All rights reserved. Subject to modifications without prior notice. Vibration is less than 2.5 m/s²

Technical data: Interchangeable cassettes - WK, Hexagon insert - SA, Retaining ring - HR

Type	WK Typ	R mm	H ₁ mm	N·m max ^{*1}	lbf·ft max ^{*1}			SA ^{*2} SW/ SW	HR mm
LDK-3 ^{*1}	WK3-32	28.5	91	1700	1300	-	-	-	-
	WK3-36	31.5	91	2100	1550	-	-	-	-
	WK3-41	34.5	91	2500	1850	SA3-41»36	SA3-41»32	SA3-41»30	HR-41
	WK3-46	38.5	91	2890	2130	SA3-46»41	SA3-46»36	SA3-46»32	HR-46
	WK3-50	42.0	103	3290	2430	SA3-50»46	SA3-50»41	SA3-50»36	HR-50
	WK3-55	45.0	103	3290	2430	SA3-55»50	SA3-55»46	SA3-55»41	HR-55
	WK3-60	47.5	103	3290	2430	SA3-60»55	SA3-60»50	SA3-60»46	HR-60
LDK-6 ^{*1}	WK6-41	34.5	115	3840	2830	SA6-41»36	-	-	HR-41
	WK6-46	39.5	115	4805	3540	SA6-46»41	SA6-46»36	SA6-46»32	HR-46
	WK6-50	43.5	115	5410	3990	SA6-50»46	SA6-50»41	SA6-50»36	HR-50
	WK6-55	46.5	115	5410	3990	SA6-55»50	SA6-55»46	SA6-55»41	HR-55
	WK6-60	48.5	115	5410	3990	SA6-60»55	SA6-60»50	SA6-60»46	HR-60
	WK6-65	52.5	130	6190	4570	SA6-65»60	SA6-65»55	SA6-65»50	HR-65
	WK6-70	55.5	130	6190	4570	SA6-70»65	SA6-70»60	SA6-70»55	HR-70
	WK6-75	57.5	130	6190	4570	SA6-75»70	SA6-75»65	SA6-75»60	HR-75
	WK6-80	60.5	130	6190	4570	SA6-80»75	SA6-80»70	SA6-80»65	HR-80
LDK-12 ^{*1}	WK12-55	46.5	141	8000	5900	SA12-55»50	SA12-55»46	SA12-55»41	HR-55
	WK12-60	48.5	141	8000	5900	SA12-60»55	SA12-60»50	SA12-60»46	HR-60
	WK12-65	52.5	141	9800	7230	SA12-65»60	SA12-65»55	SA12-65»50	HR-65
	WK12-70	55.5	141	9800	7230	SA12-70»65	SA12-70»60	SA12-70»55	HR-70
	WK12-75	57.5	141	9800	7230	SA12-75»70	SA12-75»65	SA12-75»60	HR-75
	WK12-80	60.5	141	10 860	8010	SA12-80»75	SA12-80»70	SA12-80»65	HR-80
	WK12-85	64.5	156	12 500	9220	SA12-85»80	SA12-85»75	SA12-85»70	HR-85
	WK12-90	67.5	156	12 500	9220	SA12-90»85	SA12-90»80	SA12-90»75	HR-90
	WK12-95	70.5	156	12 500	9220	SA12-95»90	SA12-95»85	SA12-95»80	HR-95
	WK12-100	73.5	156	12 500	9220	SA12-100»95	SA12-100»90	SA12-100»85	HR-100
LDK-24	WK24-80	62.0	182	13 950	10 290	SA24-80»75	SA24-80»70	SA24-80»65	HR-80
	WK24-85	66.0	182	15 810	11 660	SA24-85»80	SA24-85»75	SA24-85»70	HR-85
	WK24-90	69.0	182	16 430	12 120	SA24-90»85	SA24-90»80	SA24-90»75	HR-90
	WK24-95	72.0	182	17 860	13 170	SA24-95»90	SA24-95»85	SA24-95»80	HR-95
	WK24-100	76.0	182	17 860	13 170	SA24-100»95	SA24-100»90	SA24-100»85	HR-100
	WK24-105	80.0	182	17 860	13 170	SA24-105»100	SA24-105»95	SA24-105»90	HR-105
	WK24-110	84.0	202	24 000	17 700	SA24-110»105	SA24-110»100	SA24-110»95	HR-110
	WK24-115	87.0	202	24 000	17 700	SA24-115»110	SA24-115»105	SA24-115»100	HR-115
	WK24-120	90.0	202	24 000	17 700	SA24-120»115	SA24-120»110	SA24-120»105	HR-120
	WK24-125	93.0	202	24 000	17 700	SA24-125»120	SA24-125»115	SA24-125»110	HR-125
	WK24-130	96.0	202	24 000	17 700	SA24-130»125	SA24-130»120	SA24-130»115	HR-130

^{*1} Optional 360° rotating hydraulic connection
Continuous sound pressure level corresponding to <70 dB (A)

^{*2} Maximum torque at 800 bar


^{*3} Special adapter on request

Vibration is less than 2.5 m/s²



THE HYDRAULIC UNIT

LHU SERIES

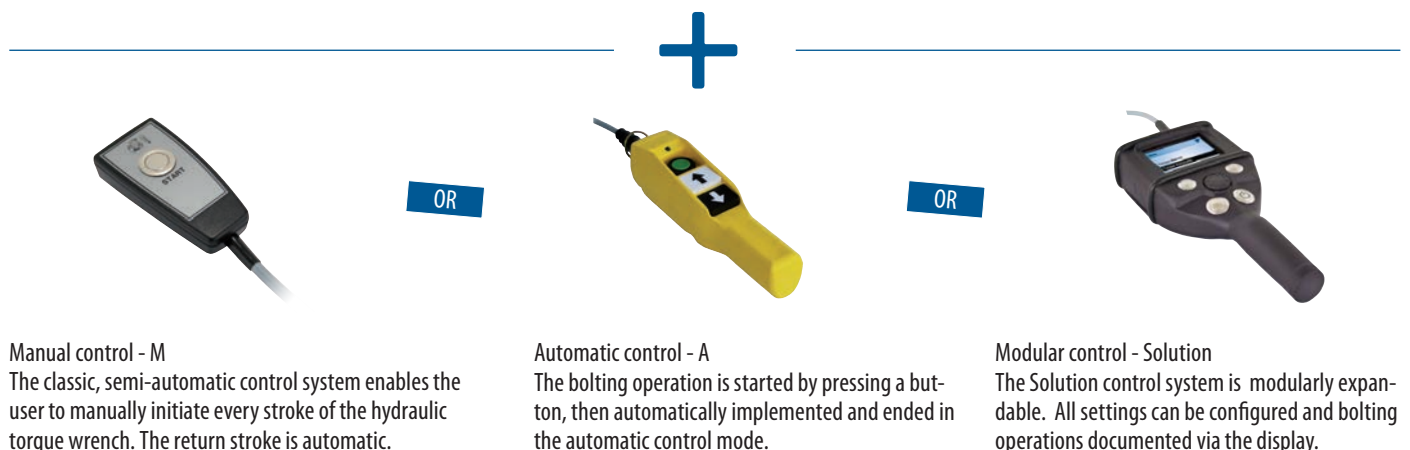

Technical data



Type	V / Hz	MP L/min., bar	HP L/min., bar	Tank L ^{*1}	LxBxH mm	kg ^{*2} – M	kg ^{*2} – A	kg ^{*2} – Solution
LHU-30	110/50	2.1/320	0.7/800	3.0	400x240x380	27.0	27.2	27.5
LHU-30	110/60	2.5/320	0.8/800	3.0	400x240x380	27.0	27.2	27.5
LHU-30	230/50	1.7/320	0.8/800	2.5	400x240x380	27.0	27.2	27.5
LHU-30	230/60	2.5/320	0.8/800	3.0	400x240x380	27.0	27.2	27.5
LHU-35	110/50	3.0/320	0.8/800	3.5	570x275x400	41.5	42.0	42.5
LHU-35	110/60	3.5/320	1.0/800	3.5	570x275x400	41.5	42.0	42.5
LHU-40	230/50	3.1/320	0.7/800	4.0	480x270x400	33.0	33.5	34.0
LHU-40	230/60	3.7/320	0.9/800	4.0	480x270x400	33.0	33.5	34.0
LHU-60	400/50, 60	4.7, 5.6/320	1.4, 1.7/800	6.2	480x270x400	36.5	37.2	37.5

^{*1} Supplied filled with oil and ready for operation

^{*2} Weight with control system, without oil

Vibration is less than 2.5 m/s²

Continuous sound pressure level corresponding to 65 dB (A) at idle and 83 dB (A) at max. pressure of 800 bar.
All rights reserved. Subject to modifications without prior notice.



Modular control LHU Solution

The LHU Solution series is the high-end model in modern hydraulic unit technology. The operator controls the entire bolting process via remote control. In addition to the basic bolting methods (manual, automatic and torque-rotation angle), the control system can be retrofitted according to your requirements with additional modules of our bolting software.

More information about documentation modules
see pages 54/55



The display and its functions:

Integrated work lighting

Visual and acoustic user guidance

3.5 „high-resolution LCD color display with impact-resistant macrolon screen

Back button

Start bolting



Integrated holding magnets on the back for secure fixation on metallic surfaces

Inductive interface for data transmission

Adjustment wheel for easy selection of bolting options and torque values

Enter button

Pump OFF



LKV, LKS

MANUAL SOLUTIONS

LKV



SCOPE OF DELIVERY

- › DEVICE
- › REACTION ARM CRANKED
- › TOOL BOX
- › OPERATING MANUAL
- › FACTORY CALIBRATION CERTIFICATE
- › TORQUE CALCULATOR



LKV-L OR Z



SCOPE OF DELIVERY

- › DEVICE
- › REACTION ARM
- › TOOL BOX
- › OPERATING MANUAL
- › FACTORY CALIBRATION CERTIFICATE
- › TORQUE CALCULATOR



LKS



SCOPE OF DELIVERY


- › DEVICE
- › OPERATING MANUAL

THE TORQUE MULTIPLIER

LKV SERIES, 500 - 54000 Nm



Technical data LKV-40 - LKV-120RS

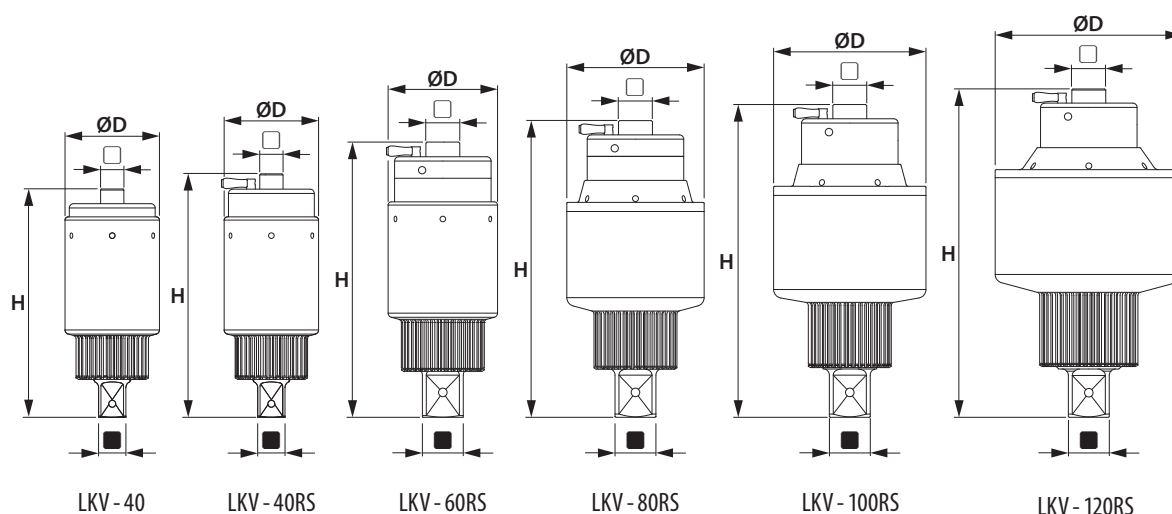

Type	 N·m max	 lbf·ft max	 N·m min / max ^{*1}	 lbf·ft min / max ^{*1}	 ^{*2}			Ø D mm	H mm	 ^{*3} kg
LKV-40	300	220	500 - 4000	400 - 2930	1:16	½"	1"	88	212.8	3.9
LKV-40RS	310	230	500 - 4000	400 - 2930	1:16	½"	1"	88	226.9	4.2
LKV-60RS	400	300	650 - 6000	500 - 4400	1:18	¾"	1 ½"	102	256.2	6.6
LKV-80RS	420	310	800 - 8000	600 - 5870	1:22	¾"	1 ½"	128	276.5	9.1
LKV-100RS	410	305	1000 - 10 000	700 - 7330	1:28.5	¾"	1 ½"	142	291.5	10.9
LKV-120RS	380	280	1320 - 13 000	1000 - 9530	1:39	¾"	1 ½"	174.5	306	17.0

^{*1} Maximum load limit! Take into account a reserve of ~25% when selecting a device and, where applicable, note increased loosening torques!

^{*2} Approximate data ^{*3} Without reaction arm (except for LKV-550RS device with reaction plate)

Further torque ranges on request. All rights reserved. Subject to modifications without prior notice.



Scope of delivery

- › Device
- › Reaction arm cranked with lock on function made of chrome vanadium steel (up to LKV-80 RS)
- › Tool box
- › Operating instructions
- › Factory calibration certificate
- › Torque calculator



Optional accessories

- › Reaction arm cranked with lock on function, made of light alloy with protective cap made of steel (from LKV-100RS)
- › Reaction arm made of light alloy, straight with adjustable locking knob with moveable square-end and retaining ring (up to LKV-80RS)



THE TORQUE MULTIPLIER SERIES LKV, 50 - 1300 Nm



Scope of delivery

- › Device
- › Reaction arm cranked with lock on function made of chrome vanadium steel
- › Tool box
- › Operating Instructions
- › Factory calibration certificate
- › Torque calculator



Optional accessories

- › Reaction arm made of light alloy, straight with adjustable locking knob with slave square and retaining ring
- › Replacement sun wheel (replacement part)



TECHNICAL DATA LKV-12




Small, easy to handle, light and sturdy

The smallest torque multiplier in this series is particularly suitable for maintenance purposes and in workshops. The little power packet has been reduced to the smallest possible dimensions without losing any robustness or torque power. It is equipped with an offset reaction arm and can be retrofitted with a straight reaction arm.

The sun gear acts as a predetermined breaking point if the device is overloaded. This protects both the operator and the device. The sun gear can be easily and rapidly replaced by the operator. Assembly and cost outlay remain low.

The optimal on-board tool

The LKV-12 has small dimensions and can fit in a pocket. This device is highly suitable for use as an on-board tool in utility or construction site vehicles. It can be stored in the vehicle in a stable transport case. Due to the minimum lubrication of the gear unit, the device is not effected by temperature changes and can be operated without problems even at freezing temperatures.



Type	N-m max	lbf-ft max	N-m min / max ^{*1}	lbf-ft min / max ^{*1}	^{*2}			Ø D mm	H mm	^{*3} kg
LKV-12	270	200	50 - 1300	40 - 950	1:5	1/2"	3/4"	80	132.5	1.3

^{*1} Maximum load limit! Take into account a reserve of ~25% when selecting a device and, where applicable, note increased loosening torques!

^{*2} Approximate data

^{*3} Without reaction arm

All rights reserved. Subject to modifications without prior notice.



THE TORQUE MULTIPLIER SERIES LKV, 100 - 2800 Nm

Lightweight, high-performance aluminium housing is 30 % lighter than a steel one



Output square as overload protection for gear unit protection



Supplied with individual GEDORE factory calibration certificate



Fixed reaction arm in straight or cranked version



Series LKV-20L/ 28L



Scope of delivery

- › Device
- › Reaction arm cranked or straight (screwed to the device)
- › Tool box
- › Operating Instructions
- › Factory calibration certificate
- › Torque calculator



Replacement parts

- › Replacement square drive for LKV-20
- › Replacement square drive for LKV-28



TECHNICAL DATA LKV-20/28




Popular for flange bolt connections: LKV-20/28L

The positioning of the torque multiplier must be implemented easily and rapidly, particularly for flange bolt connections. The LKV-L is equipped with a fixed straight reaction arm and is therefore a complete solution for flange bolt connections. The required spacing between two bolts can be rapidly and easily set using the adjustable reaction square, accelerating work.




Practical and easy to handle: LKV-20/28Z

The LKV-Z series is particularly suitable for mechanical and plant engineering, maintenance and the transport industry. This series also has a fixed reaction arm, but cranked version. The gear unit is protected against overload with a shearing square which can be easily replaced.



LKV-L



LKV-Z

Type	N·m max	lbf·ft max	N·m min / max* ¹	lbf·ft min / max* ¹	: * ²			A mm	A ₁ mm	Ø D mm	H mm	R mm	L mm	kg * ³
LKV-20L	580	430	100 - 2000	70 - 1500	1:4	¾"	1"	152	73	88	131	43	220	1.8
LKV-20Z	580	430	100 - 2000	70 - 1500	1:4	¾"	1"	150	100	88	131	43	194	1.8
LKV-28L	550	410	500 - 2800	400 - 2050	1:5.5	¾"	1"	199	83	106	146	52	275	2.4
LKV-28Z	550	410	500 - 2800	400 - 2050	1:5.5	¾"	1"	151	101	106	146	52	204	2.4

*¹ Maximum load limit! Take into account a reserve of ~25% when selecting a device and, where applicable, note increased loosening torques!

*² Approximate data *³ Without reaction arm

All rights reserved. Subject to modifications without prior notice.



THE COUNTER WRENCH

LKS SERIES, RSW 32 - 115 mm

Rugged housing made of cast steel

The allen screw fixes the ring wrench inserts and enables simple and rapid replacement


Pivoted reaction arm adjusts to the most diverse environments. Can also be used without reaction arm

Various ring wrench inserts enable universal holding up

Optional ring wrench inserts
RSW 32-115mm

Ring wrench inserts with different widths of 32-115 mm

Special inserts on request

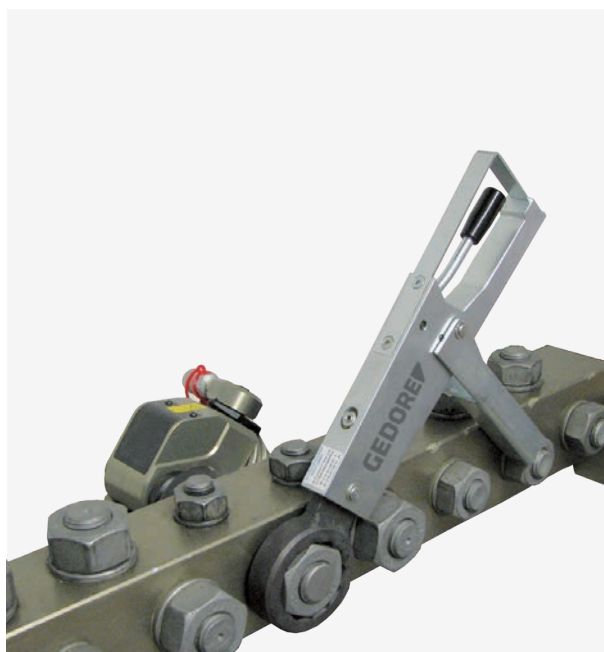



Danger to assembly personnel must be avoided

Every user knows the problems and dangerous situations that can arise when counter-holding while a bolted connection is being tightened. The wrench used for counter-holding can often rotate with unpredictable torques, block or jump off. Once the bolting operation is complete, it often needs to be levered off or even knocked off. The danger of injury for the assembly personnel is very high here and the risk of damaging neighbouring components or the tools is also significant. The results can be irritating, time loss and assembly downtimes.

The solution: The GEDORE Counter Wrench

Equipped with the appropriate insert, the device utilises a thrust bearing and absorbs the driving torque with the integrated mechanics. Following completion of the bolting operation, a simple press of the lever and the counter-wrench can be rapidly and easily released.



Frequently copied, but never matched

The patented mechanism of the GEDORE counter wrench is unique. Only the precise interplay of the individual components ensures correct and problem-free function. Cheaper copies can bend or stick under large loads. The ring inserts are made of forged chrome-vanadium steel as of size 70.




Technical data

Type	L ₁ mm	B ₁ mm	H ₁ mm	L ₂ mm	B ₂ mm	H ₂ mm	
LKS	310	27	65/95	190	38	30	2.6 / 0.4 ^{*1}

^{*1} Plus reaction element

Ring wrench inserts type RSW^{*2}

RSW mm	Ø ^{*3} mm	RSW mm	Ø ^{*3} mm	RSW mm	Ø ^{*3} mm
32	54	60	94	90	152
36	54	65	104	95	152
41	60	70	110	100	155
46	75	75	115	105	172
50	80	80	126	110	172
55	88	85	130	115	172

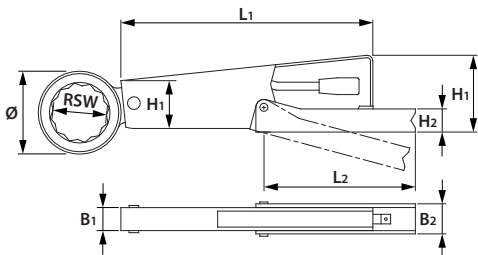

^{*2} According to DIN 7444, ^{*3} Head Diameter
All rights reserved. Subject to modifications without prior notice.

WORK LOGGED AND CONTROLLED WITH THE BOLTING SOFTWARE

Increasing safety and quality requirements make it necessary to prove the quality of each individual fitting.

With the software modules, bolted connections can not only be predefined and saved, but also logged for quality-assured archiving.

Documentation module TRACK for quality assurance

With the module TRACK bolting processes can be traced.
During the bolting work, the data is logged and then exported to the PC.
A bolting protocol can be created and saved as Adobe PDF or Microsoft Excel file.

This ensures that all bolts have been bolted with the correct settings.
The encrypted log file ensures that manipulation of the data is excluded.

Bolted Screw Protocol

GEDORE

Master data

Personal Number		Project Number	
Date			
Application Type		Subassembly	
ID No. bolt		Department	
Tool	LHD-75	Quantity	
		Serial Number	

Tightening process
Torque tightening

Evaluation

Legend Status:
AB = cancel, ÜL = overloading, TEMP = excess temperature, i.O = OK, n. i.O = not OK

No.	Date	Time	R/L	Target torque [Nm]	Actual torque [Nm]	Typical bolt	Status
1	22.01.2018	8:57:35	R	2800	2887	M36	i.O.
2	22.01.2018	13:14:04	R	8000	7957	M56	i.O.
3	22.01.2018	13:14:18	R	8000	7900	M56	i.O.
4	22.01.2018	13:16:07	R	8000	7957	M56	i.O.
5	22.01.2018	13:19:00	R	8000	7992	M56	i.O.
6	22.01.2018	13:19:27	R	6500	6510	M48	i.O.
7	22.01.2018	13:19:40	R	6500	6503	M48	i.O.
8	22.01.2018	13:54:58	R	8000	8013	M56	i.O.
9	22.01.2018	13:55:14	R	8000	8002	M56	i.O.
10	22.01.2018	13:55:30	R	8000	6989	M56	ÜL
11	22.01.2018	13:55:55	R	8000	7156	M56	ÜL
12	25.01.2018	7:57:39	R	3010	3112	M39	i.O.
13	25.01.2018	8:02:43	R	8000	8015	M56	i.O.
14	25.01.2018	8:03:12	R	8000	0	M56	AB
15	25.01.2018	8:03:32	R	8000	8021	M56	i.O.
16	25.01.2018	8:03:46	R	8000	8004	M56	i.O.
17	25.01.2018	8:04:05	R	8000	8021	M56	i.O.
18	25.01.2018	8:04:21	R	8000	8004	M56	i.O.
19	25.01.2018	8:04:38	R	8000	7452	M56	ÜL
20	25.01.2018	8:04:57	R	8000	7276	M56	ÜL
21	25.01.2018	8:05:17	R	8000	7108	M56	ÜL
22	25.01.2018	8:06:41	R	2900	2912	M39	i.O.
23	25.01.2018	8:12:06	R	8000	8012	M56	i.O.
24	25.01.2018	8:12:24	R	8000	8026	M56	i.O.
25	25.01.2018	8:12:42	R	8000	8010	M56	i.O.
26	25.01.2018	8:14:30	R	6500	6521	M48	i.O.
27	25.01.2018	8:14:46	R	6500	6547	M48	i.O.
28	25.01.2018	8:15:00	R	6500	6523	M48	i.O.
29	25.01.2018	8:15:20	R	6500	6508	M48	i.O.
30	25.01.2018	8:15:35	R	6500	6557	M48	i.O.
31	25.01.2018	8:21:24	R	5000	5055	M45	i.O.
32	25.01.2018	8:21:38	R	5000	5034	M45	i.O.
33	25.01.2018	8:21:50	R	5000	5050	M45	i.O.
34	25.01.2018	8:22:03	R	5000	5063	M45	i.O.
35	25.01.2018	8:22:19	R	5000	5030	M45	i.O.
36	25.01.2018	8:22:32	R	5000	5050	M45	i.O.
37	25.01.2018	8:33:03	R	5000	5013	M45	i.O.
38	25.01.2018	8:33:17	R	5000	5030	M45	i.O.
39	25.01.2018	8:33:30	R	5000	5013	M45	i.O.
40	25.01.2018	8:33:50	R	6500	6513	M48	i.O.
41	25.01.2018	8:34:23	R	8000	8045	M56	i.O.
42	25.01.2018	8:34:44	R	4500	4503	M42	i.O.
43	25.01.2018	8:34:57	R	4500	4506	M42	i.O.

Original printed with GEDORE bolting software.

1 Detailed information

2 Log of bolting with device-specific documentation values:

- Date / time of each bolt
- Tightening process
 - DA – Torque tightening
 - DW – Torque angle tightening
- TARGET torque
- ACTUAL torque
- Typical bolt
- Bolted connection status
 - i. O – OK
 - n. i. O – not OK
 - AB – cancel
 - ÜL – overloading
 - TEMP – excess temperature

Authentic check icon
is displayed in the bolting
software

3 Forgery-proof – only original protocols are provided with this line. Manipulated documents are therefore excluded.

Quality management module QS for definition and documentation

The QS module is suitable for all companies who need to define and document bolting cases according to quality management specifications.

The bolted connections and values are pre-defined on the PC using our bolting software. Here any number of bolted connections can be defined and stored. These are then loaded via the interface to the device and stored in a database.

The operator can only select from the stored bolting cases on the device. After the bolting process, the results of each bolt are loaded back to the PC and documented via the software as a Bolted Screw Protocol. For more detailed information, see the TRACK module (p. 54).

Define bolting case

+ Define new bolting case

- 1 Detailed master data of your bolting case (including selection of tools and four freely selectable fields)
- 2 Selection of the desired tightening process
- 3 Entering the specifications of the bolting case
- 4 Definition of control parameters and error management

Data export to device

- 1 Bolting database
- 2 Selection of one or more bolting cases, which would like to be exported to the device
- 3 Export to device or delete from device
- 4 Current bolting cases on the device

Bolting software modules for the following devices available:

	LDA/LAW Solution	LDE/LEW	LHU Solution	LHD
Modul TRACK	+	+	+	+
Modul QS	+	—	+	+

+ Optional available

— Not possible



GEDORE



LTC

TORQUE TESTING BENCH TECHNOLOGY

LTC



SCOPE OF DELIVERY

- › DEVICE
- › SOFTWARE
- › OPERATING MANUAL
- › FACTORY CALIBRATION
CERTIFICATE FOR TORQUE SENSORS




THE TORQUE TESTING BENCH TECHNOLOGY

LTC SERIES, 100-5.000 Nm



Optional accessories – Bolt adapter

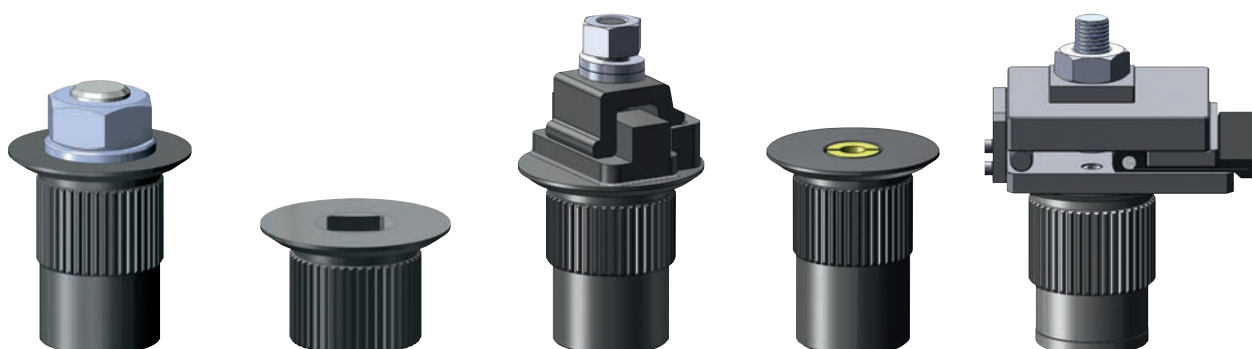

Static and dynamic torque measurements up to 5000 Nm

Static and dynamic bolting systems must be regularly checked for their torque accuracy. The Torque Check (LTC) system was developed for simple, mobile and professional dynamic torque measurement.

Torque measurement with our system

With this model you can rely on a tried-and-tested, practical measurement of your bolted cases. As in the larger LDP series the dynamic torque is determined using an original bolt. The supplied bolt adapter can be exchanged and replaced.

Basic software with comprehensive utility

The basic software included with the system has comprehensive utilities for rapid static and dynamic torque measurement in metric and imperial units. German and English are available as operating languages. At the end of each measurement, the system signals the operator immediately whether the determined values lie within the specified tolerances or not. The operator is constantly informed visually and numerically about the torque progress. This is particularly helpful when testing torque wrenches.

The basic software can be upgraded modularly to a complete test bench environment. So that the test bench grows from the entry model to a fully professional system together with your requirements.




The torque check is available for the following measuring ranges:


LTC-10	100–1000 Nm
LTC-30	300–3000 Nm
LTC-50	500–5000 Nm

Influencing factors of the bolt connection

The aim of every bolt tightening operation is to achieve the required clamp force that is generated between two components being connected. The clamp force is influenced by numerous factors in the torque process. This means that the expected clamp force may not be reached in the end because other influencing factors have reduced the force. Influencing factors can be the condition of the thread, lubrication, etc. It is therefore very important to know the bolted connection and relevant influencing factors before any bolt is tightened. But how can the required clamp force be achieved with reproducible accuracy? The answer is: calibrate the system settings using original bolts.

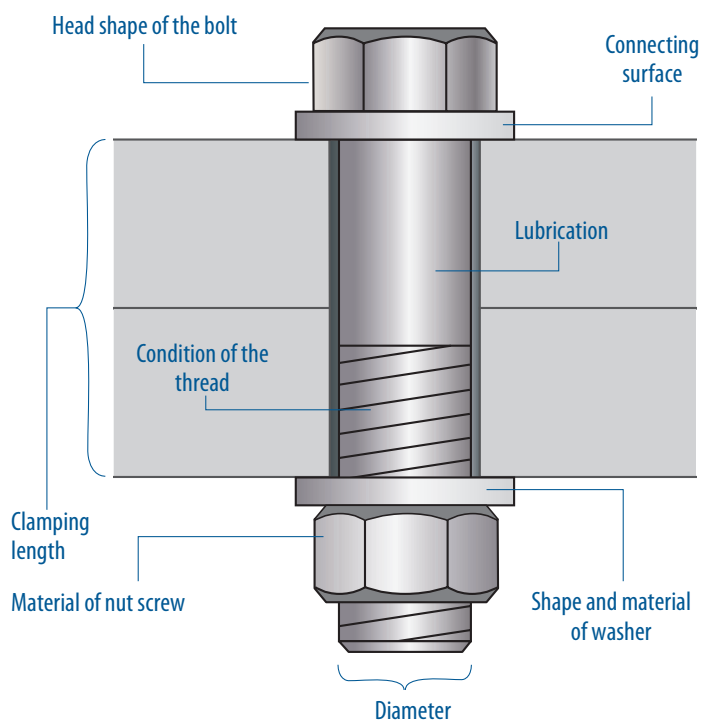

AS WE REVIEW INSIDE: THE TORQUE TESTING BENCH TECHNOLOGY

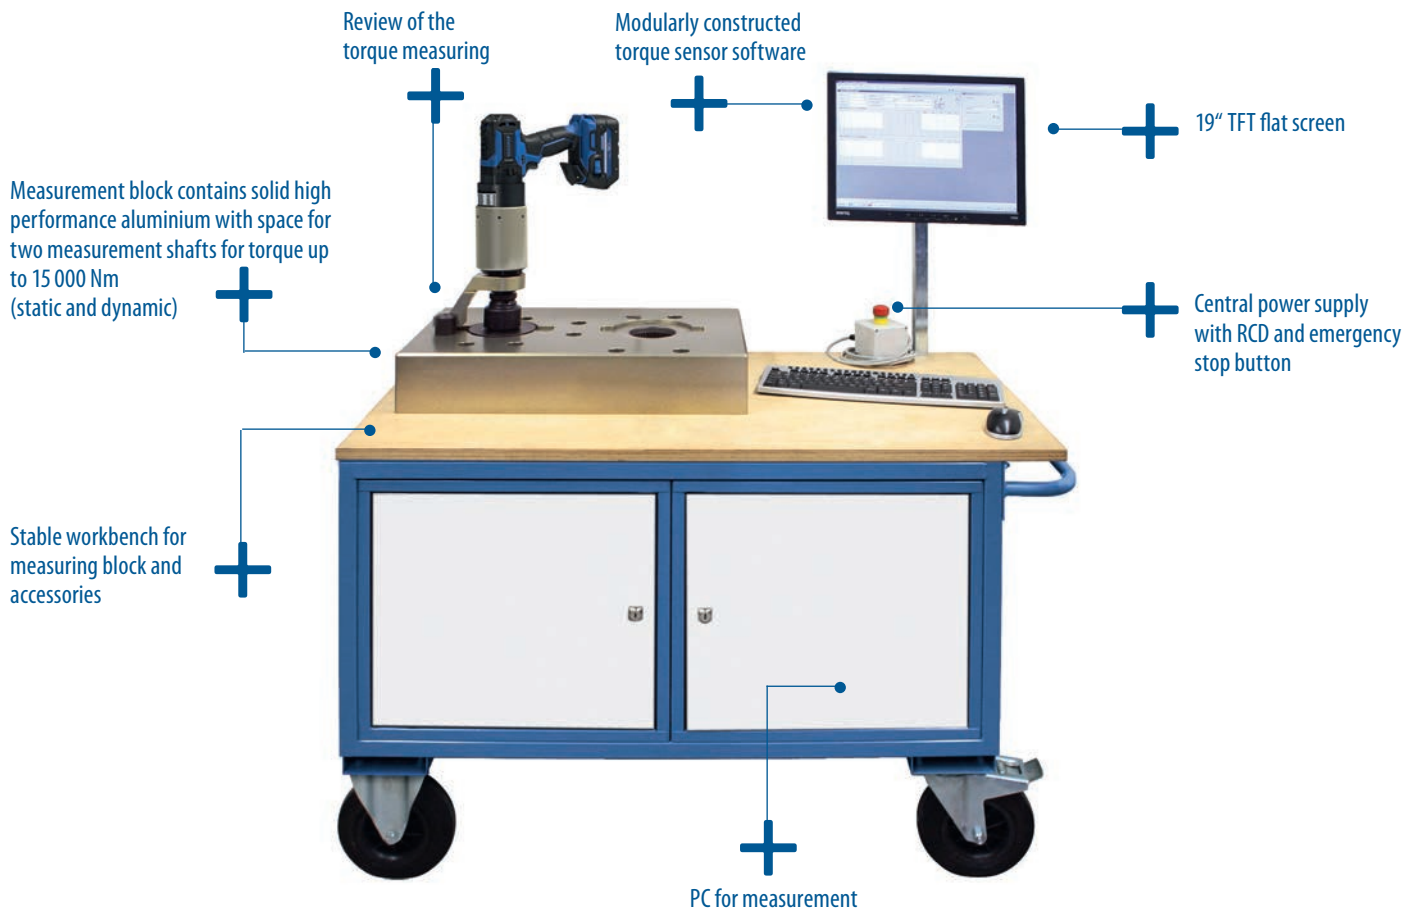

DYNAMIC TORQUE MEASUREMENT

If one considers the influencing factors that arise during the production of a correct bolted connection, it can be seen that the greatest influence is spread to the following factors based on the bolt itself: thread type and condition, grade, diameter, length, rotation speed – the list could be continued indefinitely.

Static and dynamic torque measurement up to 15000 Nm

The torque testing bench system takes the actual aspects of your bolting applications in practice into account as much as is feasible. Original bolts with all the influencing factors that act on them are measured to determine the dynamic torques. The value determined during measurement is actually equivalent to the dynamic torque applied to the bolted connection. Subsequent addition of correction factors for hard or soft bolting operations is not necessary. This allows you to implement rational and error-free measurement in all application cases.

Module for different languages

Certificates in various languages are increasingly required due to the international use of bolting systems. This is no longer a problem with the language module. The languages of all previously created factory calibration certificates can be changed during measurement and afterwards. Over 15 European and Asian languages are currently available.

For this reason, there are still no recommended measurement regulations from any of the official bodies for the traceable determination of dynamic torques. Torque measurements in which the resistance of the bolt connection is simulated via mechanical brake systems or similar, don't take into account significant influencing factors.

The modular kit

The interface between bolt and test bench is the so-called bolt adapter. The attachment of the bolt to the bolt adapter is simple. The bolted connection can be changed at any time, even during measurements. Special adaptations are just as easy with this system as the direct use of standard female hexagon inserts for static torque measurement of hydraulic wrenches, torque multipliers and torque wrenches.

Module for graphical evaluation

The average values of all measurement series are recorded graphically and shown on the factory calibration certificate. The torque curve is recorded up to the maximum value for hydraulic torque wrenches and manual torque multipliers.

THE FACTORY CALIBRATION CERTIFICATE



TOOLS FOR LIFE

Factory CALIBRATION CERTIFICATE									
for Battery torque wrench									
Date	10.03.2018	Manufacturer	GEDORE	Bolting Adapter:					
Type	LDA-22	Inspector	Max Mustermann	M20x90: II 1-3					
Serial No	DA09.00107	Temperature	23,1 °C	M24x120: I 1, II 4-7					
Inventory No		min. torque:	250 Nm	M30x130: I 2-4					
Model Year	2018	max. torque:	2180 Nm	M36x130: I 5-7					
		Tolerance	5 %						

MEASURED VALUES 1. Gear										[Nm]				EVALUATION			
Set.	1	2	3	4	5	6	7	8	9	10	Ave.	% Dev.	95% Value	105% Value	Sensor		
1	860	857	854	853	860						857	0,38	814	900			
2	1407	1362	1383	1359	1392						1381	1,47	1312	1450			
3	1824	1837	1849	1835	1784						1826	1,37	1735	1917			
4	2149	2213	2208	2224	2177						2194	1,40	2084	2304			
5	2500	2490	2500	2478	2509						2495	0,47	2371	2620			
6	2777	2852	2812	2827	2823						2818	0,97	2677	2959			
7	3207	3237	3166	3210	3182						3200	0,86	3040	3360			

MEASURED VALUES 2. Gear										[Nm]				EVALUATION			
St.	1	2	3	4	5	6	7	8	9	10	Mittel	% Abw.	95% Wert	105% Wert	Sensor		
1	346	343	352	342	345						346	1,11	329	363			
2	533	524	532	544	532						533	1,34	506	560			
3	621	636	618	619	636						626	1,44	595	657			
4	771	788	798	787	786						786	1,23	747	825			
5	865	873	884	877	886						877	0,97	833	921			
6	988	981	997	988	1018						994	1,44	945	1044			
7	1108	1104	1089	1089	1122						1102	1,26	1047	1158			

Sensor data sheet (in order to their appearance):

1: Torque Sensor, Lorenz Messtechnik D-2271, SN: 102552, 15000 Nm

2: Torque Sensor, Lorenz Messtechnik D-2288, SN: 104305, 2000 Nm

All measured values in this document are executed with a regular proofed calibration equipment.

So that the lead back to ISO 9000 ff are guaranteed.

LPU: 201101171

1 Secure DataMatrix Code

2 Individual factory calibration certificate for every planetary gear torque wrench with individual serial number for clear identification

3 Transparency and safety results from deviation data taking the efficiency into consideration

4 Various languages available on request

5 Three to five complete measurement series per torque level depending on the device type

6 The torque values are duplicated on the tool label:

1. GANG 1. GEAR 1. VITESSE		
1	857	Nm
2	1381	Nm
3	1826	Nm
4	2194	Nm
5	2495	Nm
6	2818	Nm
7	3200	Nm
GEDORE		
Ser.-Nr. DA09.00107		
GEDORE Torque Solutions GmbH		
Bertha-Benz-Str. 12-16 71665 Vaihingen/Enz		
T. +49 70 42 / 94 41-0		
Made in Germany		

2. GANG 2. GEAR 2. VITESSE		
1	346	Nm
2	533	Nm
3	626	Nm
4	786	Nm
5	877	Nm
6	994	Nm
7	1102	Nm
GEDORE		
Mj. 2018 Pmax. 560W		
TYP LDA-22 C€		
www.gedore-torque-solutions.com		
Made in Germany		

Individual factory calibration certificate for all planetary gear torque wrenches in the series: LDA/LAW, LDA/LAW Solution, LDE/LEW, LPK/LPK-X, LKV, LDB and LHD
Tested on standard or original bolts.

We recommend annual tool calibration of the devices, a new factory calibration certificate can be issued following this inspection if required.





SPECIAL SOLUTIONS FOR CUSTOMER SPECIFIC REQUIREMENTS

GATE VALVE
WRENCH LDA-S



GATE VALVE
WRENCH LDE-S



GATE VALVE
WRENCH LEW-S



SIDE POWER
WRENCH LES



SIDE POWER
WRENCH LPS



HEAVY DUTY
TORQUE WRENCH
LHD



THE GATE VALVE WRENCHES

SERIES LDA-S, LDE-S, LEW-S

Microprocessor-controlled
switch-off electronics

Brushless Technology
low-maintenance

Torque values readable
on the label

Gentle opening and closing of
gate valves

LDE-S (electric)
Display with integrated counter



System power: 270 Wh
Powerful 90 Wh (18 V/5 Ah)
lithium-ion battery

Ergonomic grip for
safe & non-fatiguing use

Infinitely adjustable
breakaway torque for
individual settings on
your gate valves

With LED status
signal



Optional: counter – bidirectional

LEW-S (electric)





Open every gate valve with these tools

Our gate valve wrenches are derived from the development of precision torque wrenches. Once again, unnecessary weight has been saved in this new generation. At the same time, the mountings of the moving parts in the rugged planet gear unit were improved, leading to an enormous increase in service life of the entire machine.

Impact-free and accident-free work, even with difficult gate valves

Our gate valve wrenches work fast and reliable. The electronically infinite torque settings and the soft start-up behaviour of the motor make an unexpected tearing away of the gate valve spindle impossible.

Optimal working weight of just 3.9 kg with a breakaway torque of over 900 Nm

Our gate valve wrenches are consistently weight-optimised without losing any operating comfort or the necessary safety. The complete motor unit can be rotated through 360° in all models and adapts comfortably to your application. The reaction forces are securely accommodated by the device. The operator can easily open even jammed gate valves.

Various drive systems for flexible applications

The gate valve wrenches are available with electric or cordless power systems. Determine for yourself about the gain in output, safety, flexibility and time when opening/closing your gate valves in your pipe network.



SERIES LDA-S

Robust battery technology for gate valve wrenches

The cordless gate valve wrench battery equipment is a real highlight under the gate valve wrenches.

Battery-operated but just as strong as a mains-based AC wrench, it provides a powerful breakaway torque of max. 1000 Nm.

Flexible maintenance work and pipe network maintenance

From now on, you can work with your gate valve wrench whenever you want, wherever you want and as long as you want to.

Even with this design, the torque can be reduced during operation without reducing the speed until the best possible security is achieved for the gate valve and the operator.



Scope of delivery

- › Device
- › Reaction arm, straight (light alloy)
- › 3x Lithium-ion battery (90 Wh/18 V/5 Ah)
- › Charger 220-240 V; 50/60 Hz or 110-120 V; 50/60 Hz for USA
- › Tool box
- › Operating instructions




Optional accessories


- › Reaction arm double-sided version
- › Telescopic slide rod
- › Hand lever extension (approx. 800 mm long)
- › Fixed slide rod (approx. 950 mm long)
- › Charger with 12/24V connector (specifically LDA-S)
- › Counter – bidirectional
- › Adapter 3/4" on conical square drive; 32 or 50 mm
- › Cardan joint
- › Hand wheel adapter




*Illustration similar

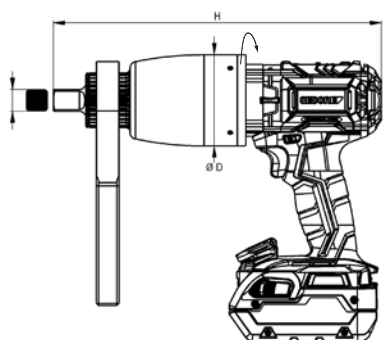

LDA-S – battery-operated

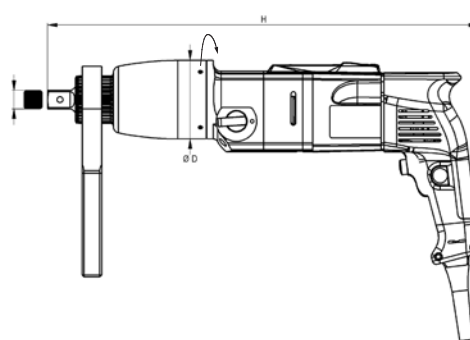

LDE-S – electric straight version

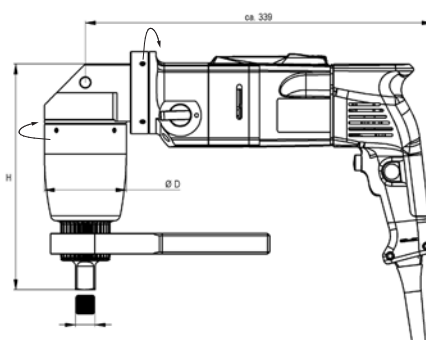

LEW-S – electric angled version

Typ	~ N·m max ^{*1}	~ lbf·ft max ^{*1}	~ U/min		Ø D mm	H mm	 ^{*2}
LDA-05S	500	370	46	3/4"	80	255	3.3 ^{*3}
LDA-07S	700	520	29	3/4"	80	287	3.9 ^{*3}
LDA-09S	900	670	23	3/4"	80	287	3.9 ^{*3}
LDE-075S	770	570	25	3/4"	80	440	5.1
LDE-09S	900	670	17	3/4"	80	440	5.2
LEW-09S	900	670	18	3/4"	80	220	6.5

^{*1} Breakaway torque in 1st gear ^{*2} Without reaction arm
The continuous sound pressure as per DIN 455635 is < 70 dB(A)

^{*3} With Battery: 740g Other torques on request
All rights reserved. Subject to modifications without prior notice.

Vibration is less than 2.5 m/s²

NEW:

We have extended our gate valve wrenches by one function
Earth anchor insertion made easy

Flexible and easy insertion of earth anchors up to approx. 1m*, for example for signs, Fence, GaLa construction, masts and much more.

With optional accessories to make work easier into the earth anchor:

- Adapter 3/4" iVk with toothing
- Hand lever extension heavy version (approx. 1000 mm long)
- Level round
- Cardan joint 3/4" for support with telescopic slide rod



THE SIDE POWER WRENCH

LES/LPS SERIES

Patented switch-off electronics protected against spray water and moisture

Infinitely adjustable torque settings with electronic overload protection

Display with integrated counter and countdown function

Patented tandem gear pulley for secure transmission of large torques up to 4800 Nm

LES-09 series



Optimised design enables space-saving positioning parallel to the tie rod

Torque values readable on the label

Braked 360° pivoting drive unit enables simple positioning on the tie rod

Various wrench widths with reduction inserts ensure universal application options

LPS series (pneumatic)



Accessories: Hexagon adapter

⬡	36 mm	41 mm	46 mm	50 mm	55 mm	60 mm	65 mm	70 mm	75 mm	80 mm
55	•	•	•							
60	•	•	•	•	•					
70	•	•	•	•	•					
80	•	•	•	•	•	•	•	•		
95						•	•	•	•	•



Specially developed for working on plate heat exchangers

We have specially developed various series of side power wrenches in this sector for the safe assembly and disassembly of plate heat exchanger systems. They work fast and reliable, are weight-optimised and designed to be user-friendly.

Regardless of whether your exchanger systems are equipped with or without thrust bearings, we have the appropriate system for all types to make your work as easy and comfortable as possible.

Our side power wrenches are available with electric or pneumatic drives.




The alternative for smaller plate heat exchangers

The LES-09 model is our entry model with a torque up to 1600 Nm. These side power wrenches are impressive because of their practical and simple operation, particularly for smaller plate heat exchanger versions.


High-performance aluminium ensures lower weight and the rotating hand grip adapts individually to the requirements of the user. The enormous bolting speed that is characteristic.

The set includes a hexagon adapter for the next smallest wrench width, including the holder for attaching the adapter to the basic unit.

Technical data



LPS - pneumatic



LES - electric

Type	~ N·m max ^{*1}	~ lbf·ft max ^{*1}	~ U/min ^{*2}	⬡ mm	A/R mm	H mm	kg ^{*3}
LPS-1/60	3000	2200	7	60	112/61	396	10.0
LPS-1/80	3600	2650	5	80	118/75	396	12.0
LPS-1/95	4800	3500	4	95	135/95	396	13.0
LES-16/60	3000	2200	7	60	112/61	503	11.1
LES-16/70	3600	2650	5	70	118/75	503	11.7
LES-16/80	3600	2650	5	80	118/75	503	11.7
LES-16/95	4800	3500	4	95	135/95	503	13.6
LES-09/55	1600	1180	13	55	86/75	480	10.0
LES-09/60	1600	1180	13	60	86/75	480	9.8

^{*1} Series LES: Breakaway torque in 1st gear

^{*1} Series LPS: Breakaway torque at 7 bar

The LES-09 series is supplied with a support plate (reaction arm not required)

^{*2} Series LES: Maximum speed in 2nd gear

^{*2} Series LPS: Maximum speed at 7 bar

All rights reserved. Subject to modifications without prior notice.

^{*3} Without reaction arm

Vibration is less than 2.5 m/s²

Scope of delivery

- › Device
- › Reaction arm, straight (light alloy) (only LES-16/LPS-1)
- › 1x Hexagon adapter (only LES-09)
- › 1x Holder (only LES-09)
- › Tool box
- › Operating instructions



Optional accessories LES/LPS

- › Reaction arm cranked with lock on function made of chrome vanadium steel (only LES-16/LPS)
- › Hose (4 m, only LPS)
- › Maintenance unit (only LPS)
- › Further hexagon adapter
- › Further holder



THE HEAVY DUTY TORQUE WRENCH LHD SERIES



Scope of delivery

- › Device
- › Reaction arm cranked with lock on function made of chrome vanadium steel
- › Powerbox 180–264 V AC / 47–63 Hz
- › Tool trolley
- › Operating instructions
- › Factory calibration certificate



Optional accessories

- › Module LD.TRACK, LD.QS

The new heavy duty screwdriver up to 7500 Nm

The new torque wrench, combining power and speed: more than twice as fast as other suppliers - for a faster insertion bolt by bolt.
Reliable operation in all weathers.

The built-in, low-maintenance brushless technology (brushless, low-wear DC drive) ensures a longer tool life.

Bolting software for data logging and quality assurance archiving


The logging of more than 10,000 bolted connections is possible with the optional available module TRACK. With the optional QS module, any number of bolted connections can be defined and stored. This greatly simplifies work on the construction site and reduces the time required.

Powerbox + accessory case for cable

Due to strong voltage fluctuations it is difficult to use electrically torque wrenches with the required accuracy. With the LHD heavy duty torque wrench, this is avoided by a voltage conversion using our power box - this way the device is always provided with the necessary voltage for proper function.


Proven system process with digital colour display

For maximum precision, the LHD offers an visual and acoustic zero-defect strategy: a sunlight-readable, digital colour display displays the entire workflow visually; in addition, an acoustic signal sounds as soon as the set value is reached.
(Further information on page 16)

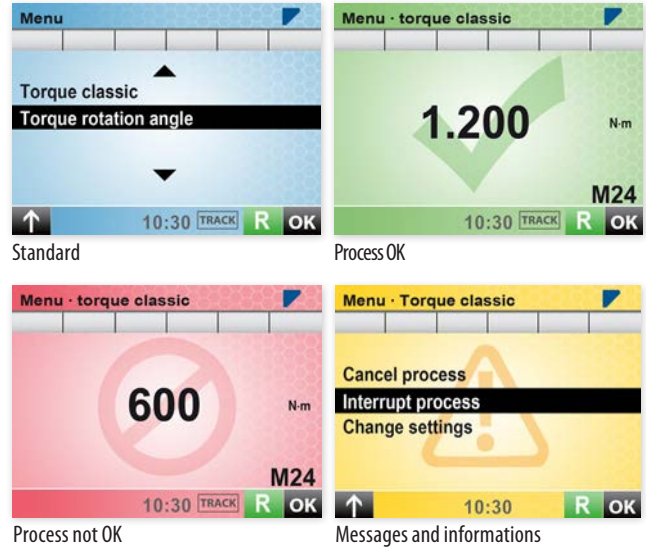

Technical Data

More information about documentation modules see pages 52/53

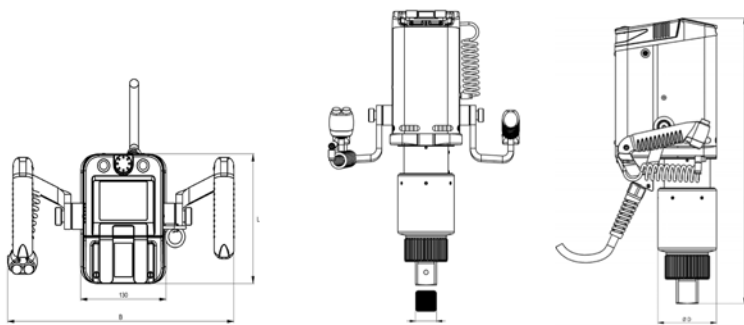

Type	~N-m min/ max	~ lbf-ft min/ max	~ U/min	■	Ø D mm	L mm	B mm	H mm	kg
LHD-75	800 - 7500	590 - 5530	10,3	1½"	102	175	345	497	14.6

Further torque ranges on request.

Type	Input voltage	Output voltage	P	L mm	B mm	H mm	kg
Powerbox	180–264 V AC / 47–63 Hz	48 V DC	3.000 W	380	445	160	9.4

Protection: IP32 Protection class I





COMPANY AND SERVICES



YOUR SPECIALIST IN HIGH LEVEL TORQUE BOLTING TECHNOLOGY



From pioneer to high-tech centre

For more than 45 years, we have represented quality and innovation in all areas of bolting technology.

A range manufactured on almost 100 %, state-of-the-art machining centres ensures the outstanding quality and precision of our torque wrenches.

The difference is simply in the detail. Our machines are Made in Germany.

We develop the torque wrenches for your future

Our specialists develop your torque wrenches with state-of-the-art construction and analysis methods (CAD/CAM/FEM). If a suitable solution is not available in our product range, we can design a specifically customised solution for you. Your applications are our challenge.



Precision testing before shipping

In our own calibration laboratories, all dynamic devices are precisely measured and configured before they are sent to you. The torque deviation is usually significantly under 3% for identical bolting operations.

The individual factory calibration certificate is the confirmation that is required by every QM system as per DIN EN ISO 9001:2008.

LOCAL-BOLTING-SERVICE WE BOLT FOR THEM

Locally, with qualified fitters and proven high-quality products

We offer you an local-bolting-service for your bolting systems with our devices. One of our qualified fitters comes to you with a fully equipped vehicle and bolts your system with our torque wrenches directly on site. Hydraulically, electrically or battery operated, we have the right device for every bolting job and bolt everything together professionally with our certified machines.

Depending on the system and the desired requirements, documentation of the bolting cases is also possible. Your bolting system deserves the best service. Please contact us and make an appointment with us! Depending on the system and the desired requirements, documentation of the bolting cases is also possible.



CONSULTATION AND TRAINING BY SPECIALISTS



Always the right solution for you

Our experts can advise you on site and analyse your application with you in order to offer the appropriate system.
Our extensive range of products, offers you the professional solution required.

In-house training

Customer safety instructions and training courses are available at our in-house training centre. Every participant is subsequently issued with a certificate as verification of training.

Product training

Product training -- on-site or in-house.

Basics of screwdriving technology:
modularly designed for technicians, master craftsmen and skilled workers.
Practice-oriented according to VDI/VDE sheet 1 "Qualification of fastening technology".
Training is carried out by external employees.



Rental equipment

Is one of your indispensable tools in repair? Do you need additional equipment in order to be able to complete your work on time and in the usual quality, even during short-term order peaks? Then use our rental equipment service! Our pool of equipment includes common electric, pneumatic and battery-powered high torque tools, hydraulic high torque tools, hydraulic power packs, power multipliers. Just contact us if you need special tools. We will be pleased to help you - quickly and reliably.

A SELECTION OF OUR CUSTOMERS AND THEIR PRODUCTS

Donges SteelTec GmbH



Donges SteelTec GmbH is a member of the Mutares Group and is one of Germany's leading steel construction companies with approximately 200 highly qualified employees. The Darmstadt-based company operates nationally and internationally. The focus is on steel bridge construction and steel building construction.
(Source: Donges SteelTec GmbH)



LDA



LDH



LHM

Putzmeister Holding GmbH



Putzmeister develops, produces, sells and serves its customers worldwide with technically high-quality and service-oriented machines in the areas of concrete delivery, truck-mounted concrete pumps, stationary concrete pumps, placing booms and accessories, plant engineering, pipe conveying of industrial viscous materials, concrete paving and overburden conveying in tunnels and underground, robot and handling technology, mortar machines, plastering machines, screed conveying, injection and special applications.
(Source: Putzmeister Holding GmbH)



LDA



LPK



LDE



LKV



LDH



LHM

thyssenkrupp Industrial Solutions AG



ThyssenKrupp Fördertechnik is one of the world's leading suppliers of machines, plants and systems for the extraction, processing and handling of raw materials. In open-cast mining and quarries, in port terminals, coal-fired power stations and in storage areas, ThyssenKrupp Fördertechnik systems are in use worldwide and continue to set new standards.
(Source: thyssenkrupp Industrial Solutions AG)



LDA



LPK



LDE



LEW



LDH



LHM

API Schmidt-Bretten GmbH & Co. KG



API Schmidt-Bretten is a worldwide recognized manufacturer of gasketed and welded plate heat exchangers and systems for the thermal treatment of pumpable media in all major markets.
(Source: API Schmidt-Bretten GmbH & Co. KG)



LES




LPS

SPECIAL REACTION ARM VERSIONS

The reaction arm of a high-torque wrench is one of the most important components on the device. It absorbs all reaction forces produced during bolting operations. It therefore has to be stable. In addition, reaction arms require a place in their surroundings where they can support themselves. Therefore, they not only need to be stable, but also suitable for a variety of environments.

As bolts can be located anywhere, it is possible that the standard reaction arm does not always fit and only a custom design will correctly absorb the reaction force. We specialise in the design of custom reaction arms. Custom reaction arms can be built and force effects simulated (FEM) in our own engineering department in Vaihingen/Enz.

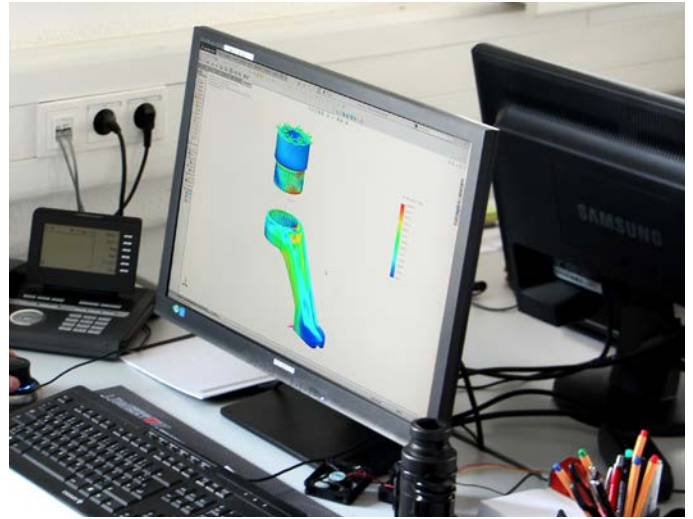

Special reaction arms




VARIOUS ADAPTERS AND INSERTS

The choice of the right impact socket is particularly important, especially with regard to occupational safety. A suddenly breaking socket can not be foreseen - serious hand and eye injuries are often the result.

You do not have to expose yourself to this risk!

Accessories are most important if the tool is to be optimally adapted to the specific assembly situation. Select the appropriate mounting or insert in various width across flats, shapes and lengths. We have the right accessories for our tools for every situation. We would be happy to advise you!

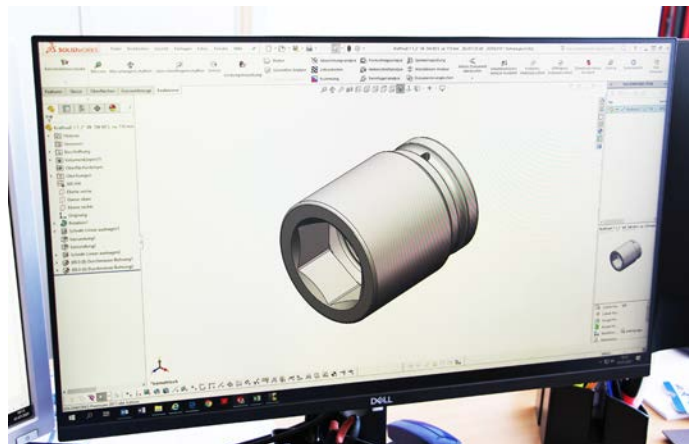

The complete programme of **sockets and inserts** can also be viewed at www.gedore.com or in the current **GEDORE** catalogue



Impact socket

Some of our sockets are available with Impact-Fix lock, quick and easy to handle.



Standard version



Conical version



Short version




Long version

Torx socket

Inside square inserts and holders
Hexagon socket inserts and holders



OUR SUCCESS STORY

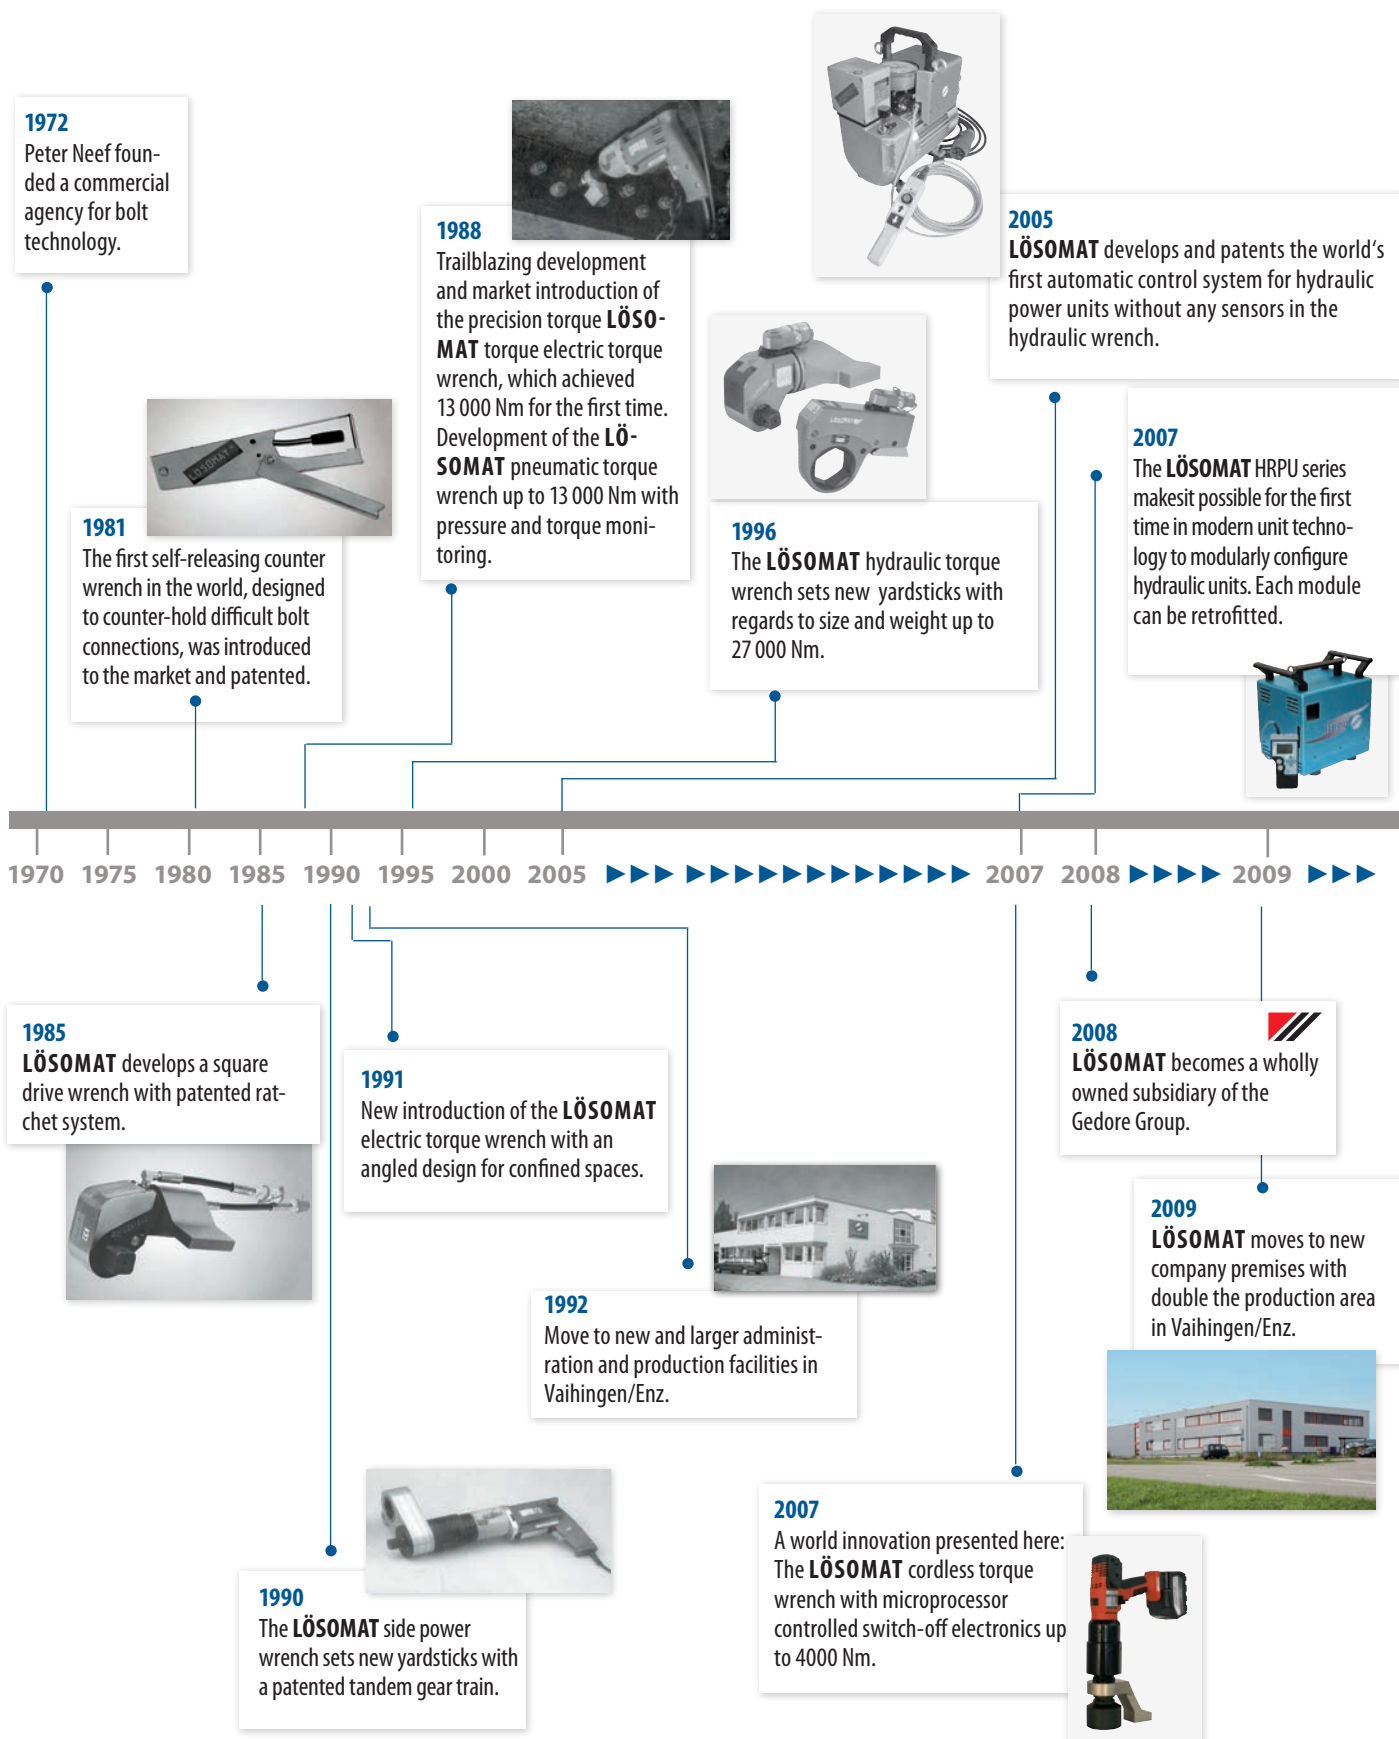

2010

LÖSOMAT awarded the Plus X Award in the categories "Ease of Use" and "High Quality" for the cordless torque wrench.

Also awarded the "Best Product 2010" award.

**2017**

Development of the **heavy duty** torque wrench **series LHD**. Brushless Technology and the Power-box make this torque wrench durable and usable in wind and weather.

2020

Our innovation the high torque cordless wrench **LDA Solution** with documentation function, torque angle mode, colour display and brushless technology up to 6000 Nm.

**2012**

Company's anniversary – 40 years of **LÖSOMAT**

GEDORE**2016**

LÖSOMAT bolting technology Neef GmbH is fully integrated into the **GEDORE** Group and receives a new name: **GEDORE Torque Solutions GmbH**.

2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020

2011

LÖSOMAT develops the LHV hydraulic unit.

**2011**

LÖSOMAT develops the force multiplier LKV with non-destructive overload protection and tooth flanks with a ceramic Teflon® coating.



KOMPETENZPREIS
BADEN-WÜRTTEMBERG
FOR INNOVATION UND QUALITÄT
2015

2014

LÖSOMAT developed the rail track wrench (LDB). With this wrench, users can bolt and drill in vertical and horizontal positions as well as in dual combination on a rail car. In 2015 **LÖSOMAT** receives the Competence Prize for Innovation and Quality Baden-Württemberg for developing the Railway Torque Wrench LDB-10.

**2018**

Further development of the **new Generation LDA Series** High torque cordless torque wrench, with low maintenance brushless Technology and ergonomic design from 90 to 6000 Nm.

**2019**

We develop our smallest wrench, the **assembly cordless torque wrench GDA**, 60 - 300 Nm.